



There is different matched stack for bearings with precision level P2,P4.

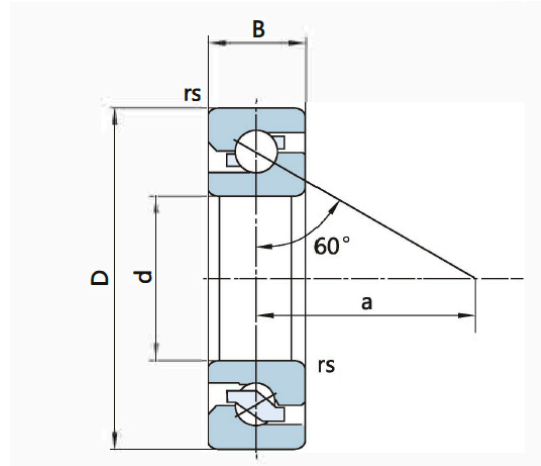

Boundary Dimensions (mm)					Basic Load Rating (kN)		Speed Rating (r/min)	Weight (kg)	Bearing No.
d	D	B	r _{s min}	a	Ca	Coa	Grease lubrication		
15	35	11	0.6	21.5	9.81	14.8	6700	0.05	760202 TN
17	40	12	0.6	25	14.2	21.3	5900	0.07	760203 TN
20	47	14	1	29	19.6	36.0	5000	0.13	760204 TN
20	52	15	1.1	39	24.5	45.5	4600	0.175	760304 TN
25	52	15	1	33.5	22.0	44.0	4300	0.16	760205 TN
25	62	17	1.1	46	28.5	58.5	3600	0.28	760305 TN
30	62	16	1	40	26.0	56.0	3600	0.24	760206 TN
30	72	19	1.1	54	34.5	78.0	3100	0.415	760306 TN
35	72	17	1.1	46.5	30.5	71.0	3100	0.345	760207 TN
35	80	21	1.5	60	36.5	86.5	2800	0.555	760307 TN
40	80	18	1.1	52	37.5	91.5	2600	0.445	760208 TN
40	90	23	1.5	68	50.0	118.0	2500	0.765	760308 TN
45	85	19	1.1	56.5	38.0	96.5	2500	0.505	760209 TN
45	100	25	1.5	75	58.5	146.0	2100	1.02	760309 TN
50	90	20	1.1	61	39.0	106.0	2300	0.575	760210 TN
50	100	27	2	83	69.5	180.0	2000	1.33	760310 TN

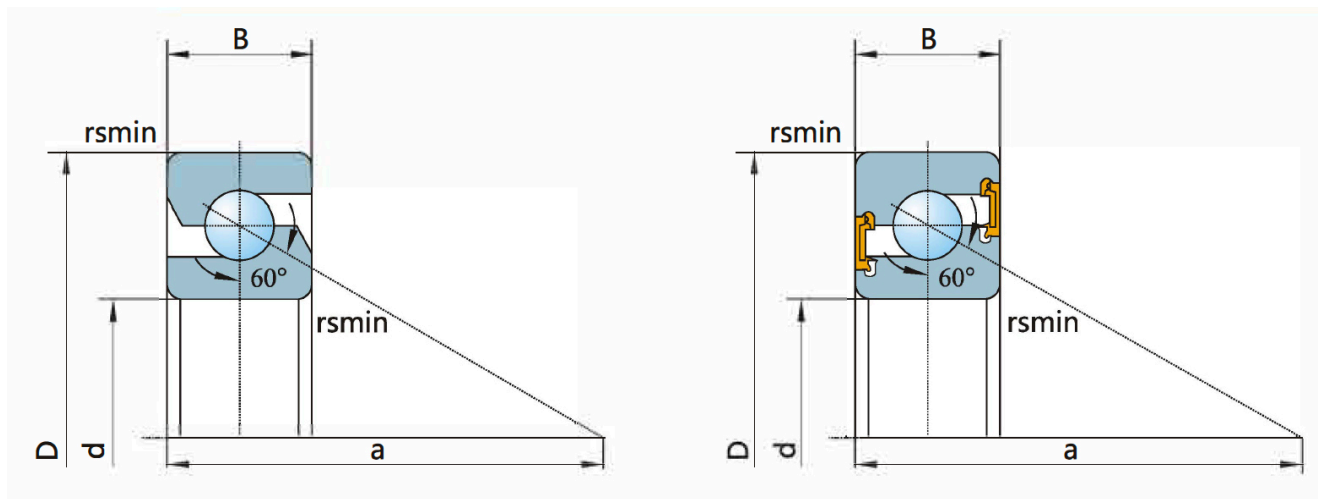

d	D	B	rsmín	Basic load rating		Forcepoint position	Speed limit		Mass	Type
				Cor	Ca	a	Oil	Grease		
mm				KN	KN	mm	r/min	r/min	kg	
15	47	15	1	21.50	27.00	36.5	8000	6000	0.13	BSB015047
17	47	15	1	21.50	27.00	36.5	8000	6000	0.14	BSB017047
20	47	15	1	21.50	27.00	36.5	8000	6000	0.13	BSB020047
25	62	15	1	28.50	41.50	46.0	6000	4500	0.24	BSB025062
30	62	15	1	26.00	39.00	47.3	5600	4300	0.23	BSB030062
35	72	15	1	30.00	50.00	56.4	5000	3600	0.3	BSB035072
40	72	15	1	28.00	49.00	56.4	4800	3600	0.26	BSB040072
	90	20	1.5	50.00	83.00	68.9	4000	3000	0.65	BSB040090
45	75	15	1	28.50	52.00	59.5	4300	3200	0.26	BSB045075
	100	20	1.5	58.80	104.00	72.8	3600	2600	0.81	BSB045100
50	100	20	1.5	58.50	104.00	75.0	3400	2600	0.75	BSB050100
55	90	15	1	32.50	65.50	70.3	3400	2600	0.38	BSB055090
	100	20	1	40.50	81.50	77.1	3400	2600	0.75	BSB055100
	120	20	2	60.00	116.00	85.8	3000	2200	1.18	BSB055120
60	120	20	1.5	61.00	120.00	87.9	3000	2200	1.11	BSB060120