



PRECISION ANGULAR CONTACT BALL BEARINGS

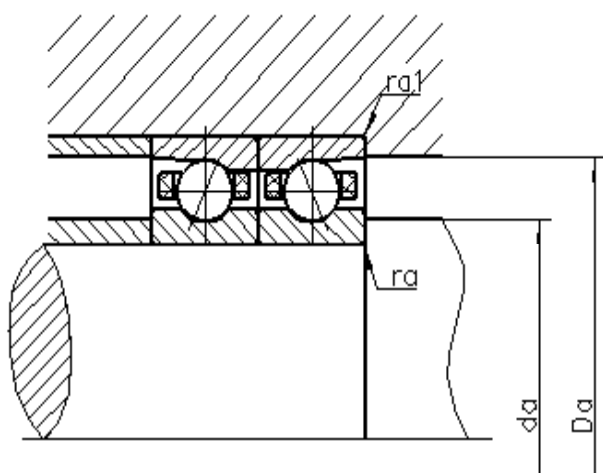

TYPE 7001C-2RZTA/P4S B7001 C 2RSD T P4S UL
PRECISION P4S

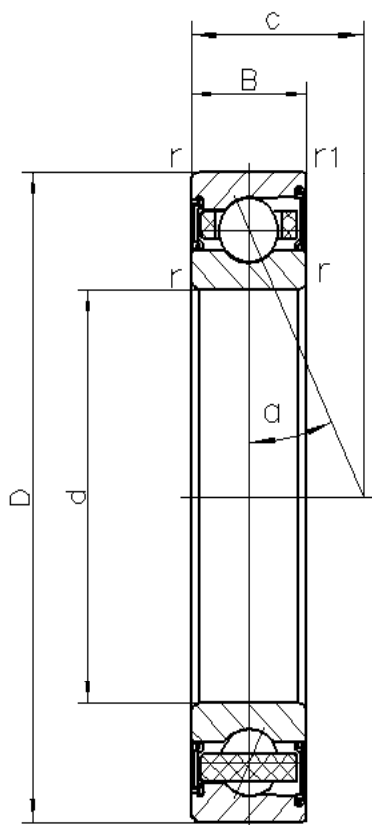

d	12	mm	
D	28	mm	
B	8	mm	
c	6.7	mm	
Da	24.5	mm	Tolerance: H12
da	16.5	mm	Tolerance: h12
r _{min}	0.3	mm	
r1 _{min}	0.3	mm	
ra _{max}	0.3	mm	
ral _{max}	0.1	mm	
α	15°		Contact angle
m	0.024	kg	Mass
Cr	3330	N	Basic dynamic load rating, radial
Cor	1910	N	Basic static load rating, radial
Fv _L	9	N	Preload force
Fv _M	27	N	Preload force
Fv _H	54	N	Preload force
Ca _L	11.4	N/um	Axial rigidity
Ca _M	16.1	N/um	Axial rigidity
Ca _H	22.8	N/um	Axial rigidity
Limiting speeds	56000	r/min	Lubrication: grease