
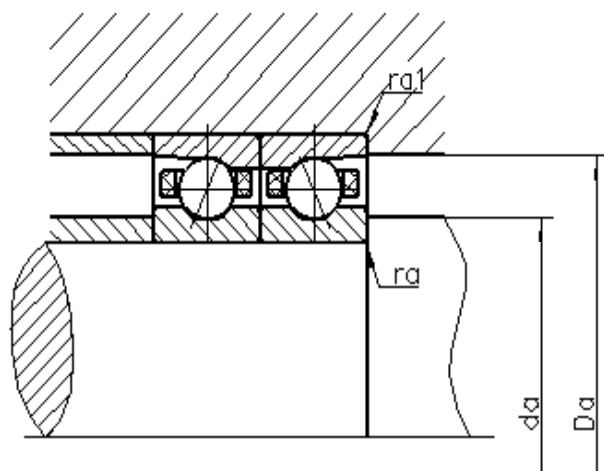


PRECISION ANGULAR CONTACT BALL BEARINGS

TYPE 7002AC-2RZTA/P4S B7002 E 2RSD T P4S UL
PRECISION P4S

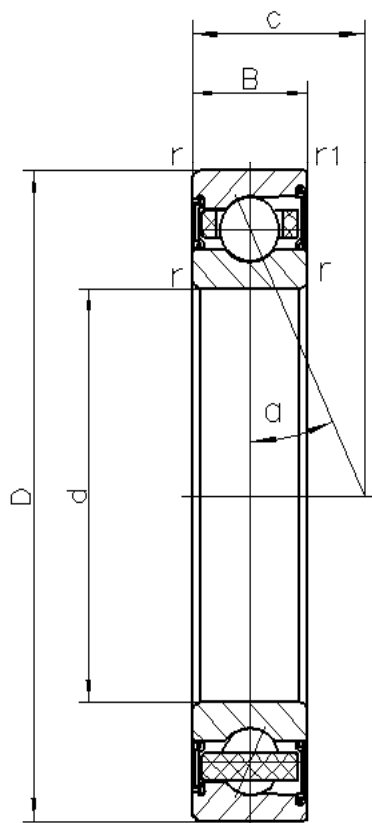

d	15	mm	
D	32	mm	
B	9	mm	
c	10	mm	
Da	28	mm	Tolerance: H12
da	19	mm	Tolerance: h12
r _{min}	0.3	mm	
r1 _{min}	0.2	mm	
ra _{max}	0.3	mm	
ra1 _{max}	0.1	mm	
α	25°		Contact angle
m	0.028	kg	Mass
Cr	6330	N	Basic dynamic load rating, radial
Cor	3530	N	Basic static load rating, radial
Fv _L	39	N	Preload force
Fv _M	100	N	Preload force
Fv _H	200	N	Preload force
Ca _L	45	N/um	Axial rigidity
Ca _M	63.7	N/um	Axial rigidity
Ca _H	83.4	N/um	Axial rigidity
Limiting speeds	45000	r/min	Lubrication: grease