


PRECISION ANGULAR CONTACT BALL BEARINGS

TYPE 7008C-2RZTA/P4S B7008 C 2RSD T P4S UL
PRECISION P4S

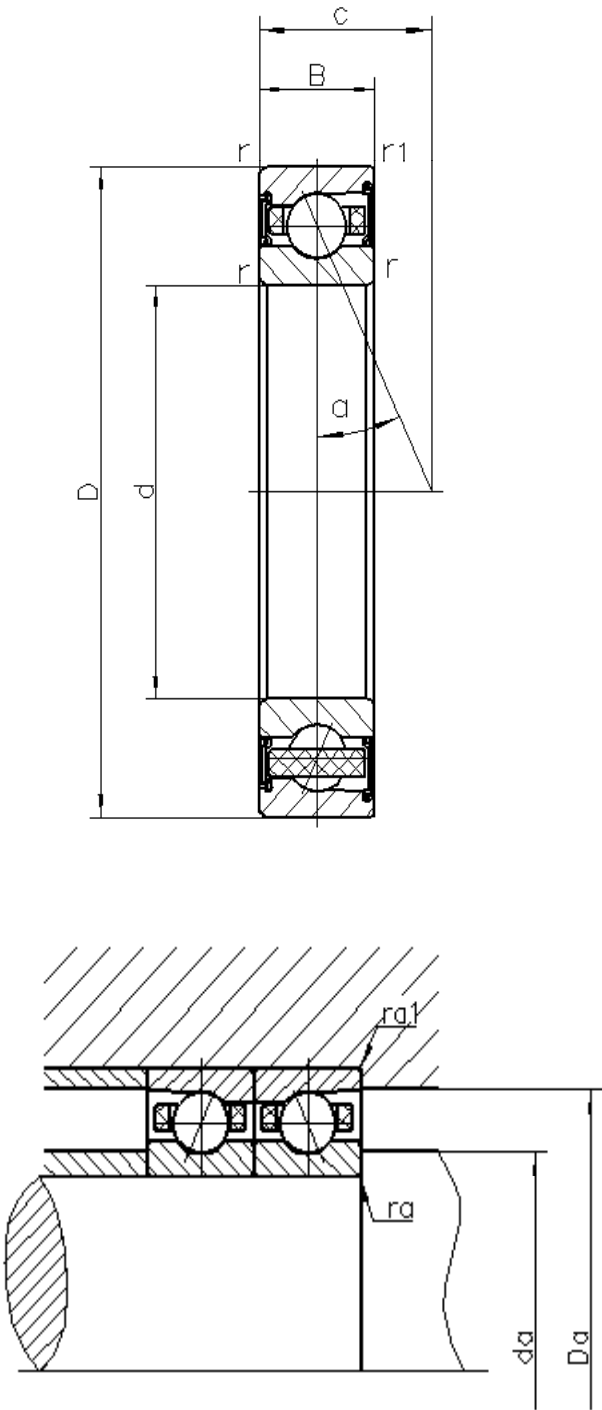

d	40	mm	
D	68	mm	
B	15	mm	
c	14.7	mm	
Da	62	mm	Tolerance: H12
da	46	mm	Tolerance: h12
r _{min}	1	mm	
r1 _{min}	0.6	mm	
ra _{max}	1	mm	
ra1 _{max}	0.3	mm	
α	15°		Contact angle
m	0.188	kg	Mass
Cr	20570	N	Basic dynamic load rating, radial
Cor	15890	N	Basic static load rating, radial
Fv _L	120	N	Preload force
Fv _M	290	N	Preload force
Fv _H	590	N	Preload force
Ca _L	47.5	N/um	Axial rigidity
Ca _M	69.6	N/um	Axial rigidity
Ca _H	97.5	N/um	Axial rigidity
Limiting speeds	19000	r/min	Lubrication: grease