


PRECISION ANGULAR CONTACT BALL BEARINGS

TYPE 7011C-2RZTA/P4S B7011 C 2RSD T P4S UL
PRECISION P4S

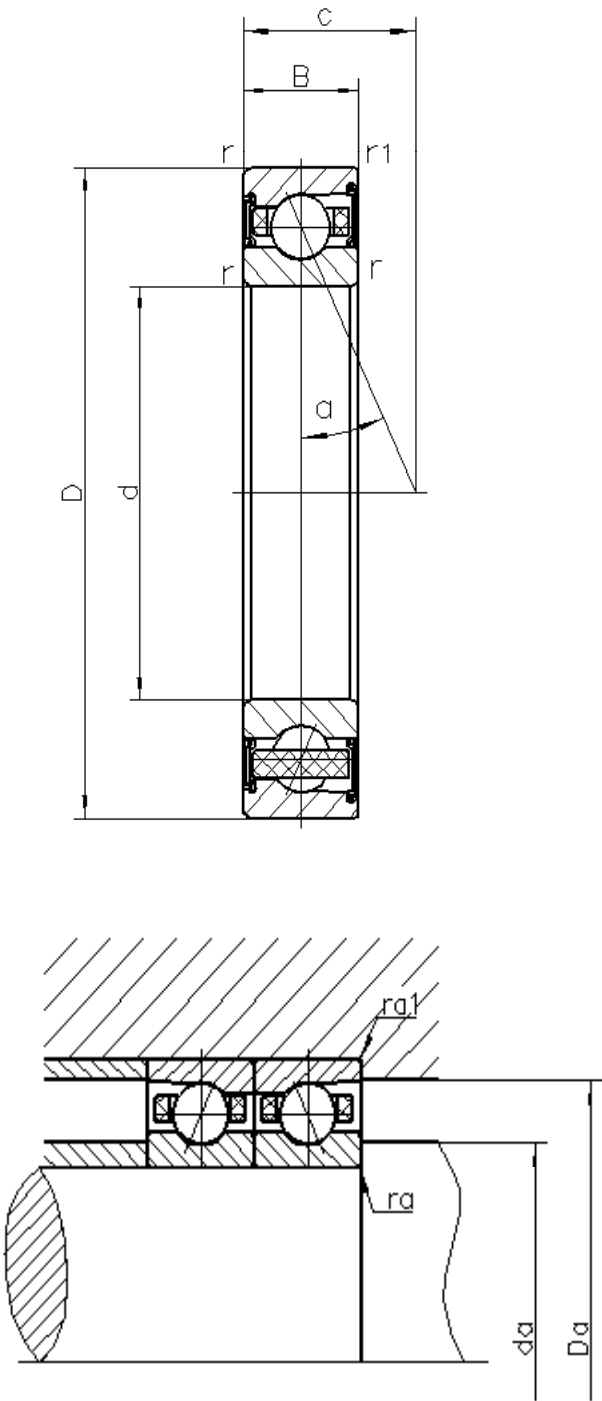

d	55	mm	
D	90	mm	
B	18	mm	
c	18.7	mm	
Da	83	mm	Tolerance: H12
da	62	mm	Tolerance: h12
r min	1.1	mm	
r1 min	0.6	mm	
ra max	1	mm	
ra1 max	0.6	mm	
α	15°		Contact angle
m	0.377	kg	Mass
Cr	34120	N	Basic dynamic load rating, radial
Cor	28600	N	Basic static load rating, radial
Fv L	200	N	Preload force
Fv M	490	N	Preload force
Fv H	980	N	Preload force
Ca L	63.5	N/um	Axial rigidity
Ca M	93.3	N/um	Axial rigidity
Ca H	129.3	N/um	Axial rigidity
Limiting speeds	15000	r/min	Lubrication: grease