
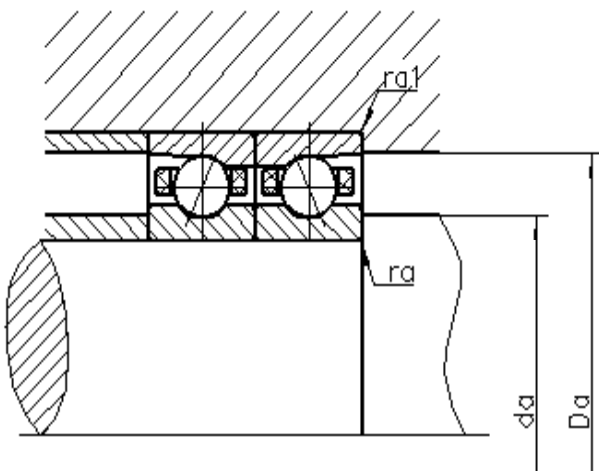


PRECISION ANGULAR CONTACT BALL BEARINGS

TYPE 7012C-2RZTA/P4S B7012 C 2RSD T P4S UL
PRECISION P4S

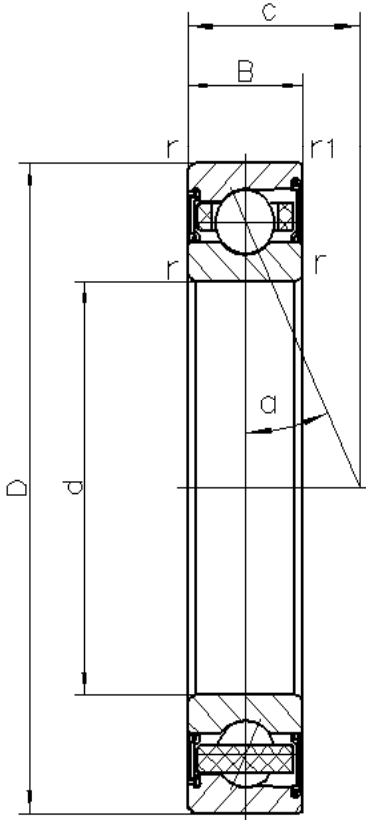

d	60	mm	
D	95	mm	
B	18	mm	
c	19.4	mm	
Da	88	mm	Tolerance: H12
da	67	mm	Tolerance: h12
r _{min}	1.1	mm	
r _{l min}	0.6	mm	
ra _{max}	1	mm	
ra _{l max}	0.6	mm	
α	15°		Contact angle
m	0.401	kg	Mass
Cr	35050	N	Basic dynamic load rating, radial
Cor	30570	N	Basic static load rating, radial
Fv _L	200	N	Preload force
Fv _M	540	N	Preload force
Fv _H	1080	N	Preload force
Ca _L	65.6	N/um	Axial rigidity
Ca _M	100.5	N/um	Axial rigidity
Ca _H	139.4	N/um	Axial rigidity
Limiting speeds	14000	r/min	Lubrication: grease