
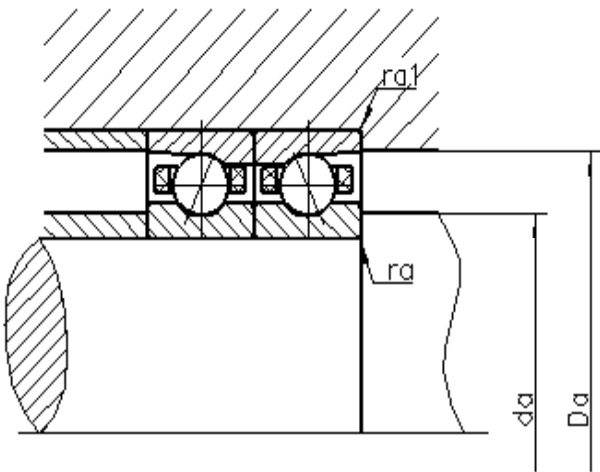


PRECISION ANGULAR CONTACT BALL BEARINGS

TYPE	7012AC-2RZTA/P4S	B7012 E 2RSD T P4S UL
PRECISION	P4S	

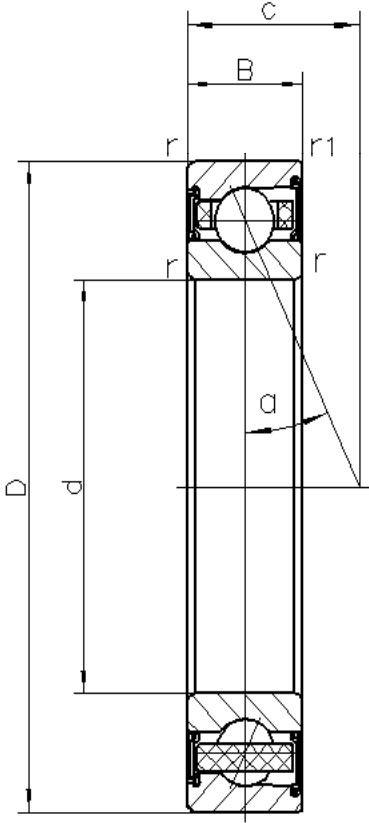

d	60	mm	
D	95	mm	
B	18	mm	
c	27.1	mm	
Da	88	mm	Tolerance: H12
da	67	mm	Tolerance: h12
r_{min}	1.1	mm	
rl_{min}	0.6	mm	
ra_{max}	1	mm	
ral_{max}	0.6	mm	
α	25°		Contact angle
m	0.401	kg	Mass
Cr	33200	N	Basic dynamic load rating, radial
Cor	29120	N	Basic static load rating, radial
Fv_L	340	N	Preload force
Fv_M	780	N	Preload force
Fv_H	1570	N	Preload force
Ca_L	163.7	N/um	Axial rigidity
Ca_M	222.7	N/um	Axial rigidity
Ca_H	292.6	N/um	Axial rigidity
Limiting speeds	13000	r/min	Lubrication: grease