


PRECISION ANGULAR CONTACT BALL BEARINGS

TYPE 71900C-2RZTA/P4S B71900 C 2RSD T P4S UL
PRECISION P4S

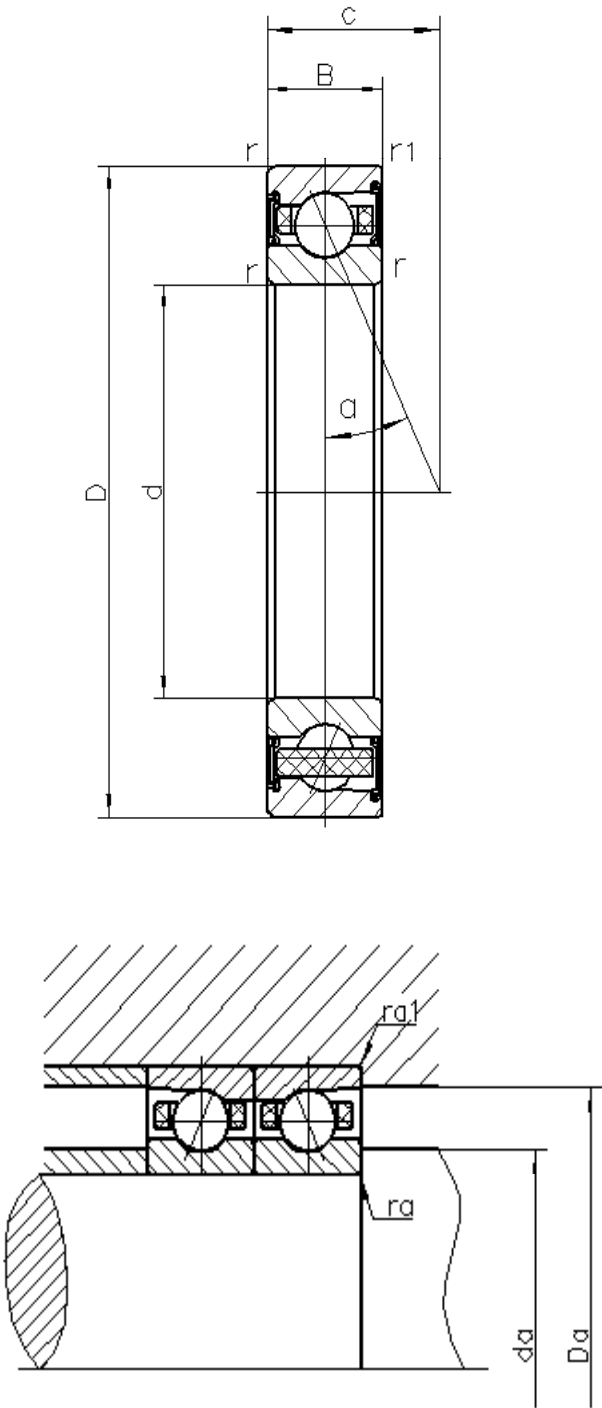

d	10	mm	
D	22	mm	
B	6	mm	
c	5.1	mm	
Da	19.5	mm	Tolerance: H12
da	13	mm	Tolerance: h12
r _{min}	0.3	mm	
r1 _{min}	0.1	mm	
ra _{max}	0.3	mm	
ra1 _{max}	0.1	mm	
α	15°		Contact angle
m	0.01	kg	Mass
Cr	2500	N	Basic dynamic load rating, radial
Cor	1320	N	Basic static load rating, radial
Fv _L	7	N	Preload force
Fv _M	20	N	Preload force
Fv _H	39	N	Preload force
Ca _L	10.3	N/um	Axial rigidity
Ca _M	13.4	N/um	Axial rigidity
Ca _H	18.6	N/um	Axial rigidity
Limiting speeds	70000	r/min	Lubrication: grease