


PRECISION ANGULAR CONTACT BALL BEARINGS

TYPE 71900AC-2RZTA/P4S B71900 E 2RSD T P4S UL  
PRECISION P4S

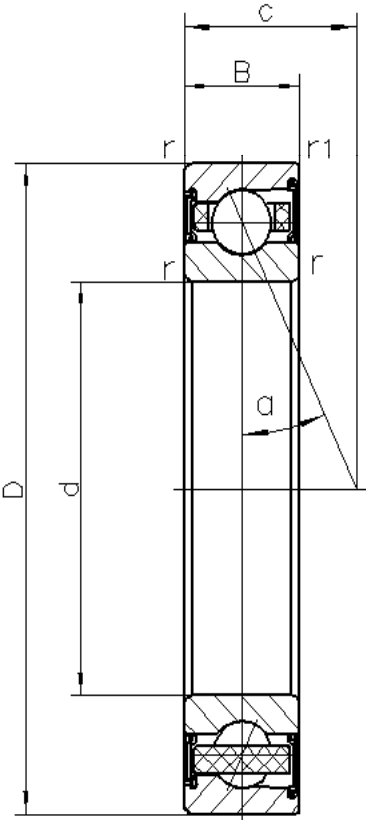

d	10	mm	
D	22	mm	
B	6	mm	
c	6.7	mm	
Da	19.5	mm	Tolerance: H12
da	13	mm	Tolerance: h12
r <sub>min</sub>	0.3	mm	
r1 <sub>min</sub>	0.1	mm	
ra <sub>max</sub>	0.3	mm	
ra1 <sub>max</sub>	0.1	mm	
α	25°		Contact angle
m	0.01	kg	Mass
Cr	2380	N	Basic dynamic load rating, radial
Cor	1260	N	Basic static load rating, radial
Fv <sub>L</sub>	11	N	Preload force
Fv <sub>M</sub>	32	N	Preload force
Fv <sub>H</sub>	64	N	Preload force
Ca <sub>L</sub>	21.3	N/um	Axial rigidity
Ca <sub>M</sub>	31.2	N/um	Axial rigidity
Ca <sub>H</sub>	42.7	N/um	Axial rigidity
Limiting speeds	63000	r/min	Lubrication: grease