


PRECISION ANGULAR CONTACT BALL BEARINGS

TYPE 71901C-2RZTA/P4S B71901 C 2RSD T P4S UL  
PRECISION P4S

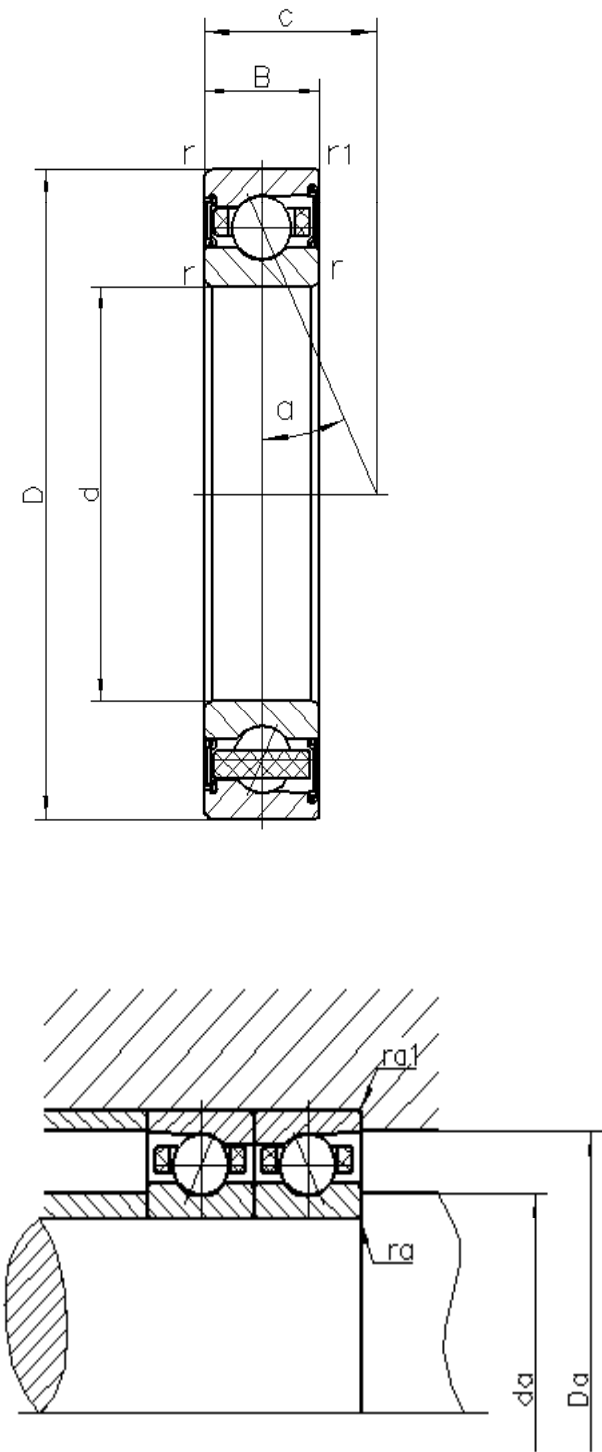

d	12	mm	
D	24	mm	
B	6	mm	
c	5.4	mm	
Da	21.5	mm	Tolerance: H12
da	15	mm	Tolerance: h12
r <sub>min</sub>	0.3	mm	
r <sub>l min</sub>	0.1	mm	
ra <sub>max</sub>	0.3	mm	
ra <sub>l max</sub>	0.1	mm	
α	15°		Contact angle
m	0.011	kg	Mass
Cr	2750	N	Basic dynamic load rating, radial
Cor	1590	N	Basic static load rating, radial
Fv <sub>L</sub>	7	N	Preload force
Fv <sub>M</sub>	21	N	Preload force
Fv <sub>H</sub>	41	N	Preload force
Ca <sub>L</sub>	11.2	N/um	Axial rigidity
Ca <sub>M</sub>	14.8	N/um	Axial rigidity
Ca <sub>H</sub>	20.6	N/um	Axial rigidity
Limiting speeds	60000	r/min	Lubrication: grease