


PRECISION ANGULAR CONTACT BALL BEARINGS

TYPE 71901AC-2RZTA/P4S B71901 E 2RSD T P4S UL
PRECISION P4S

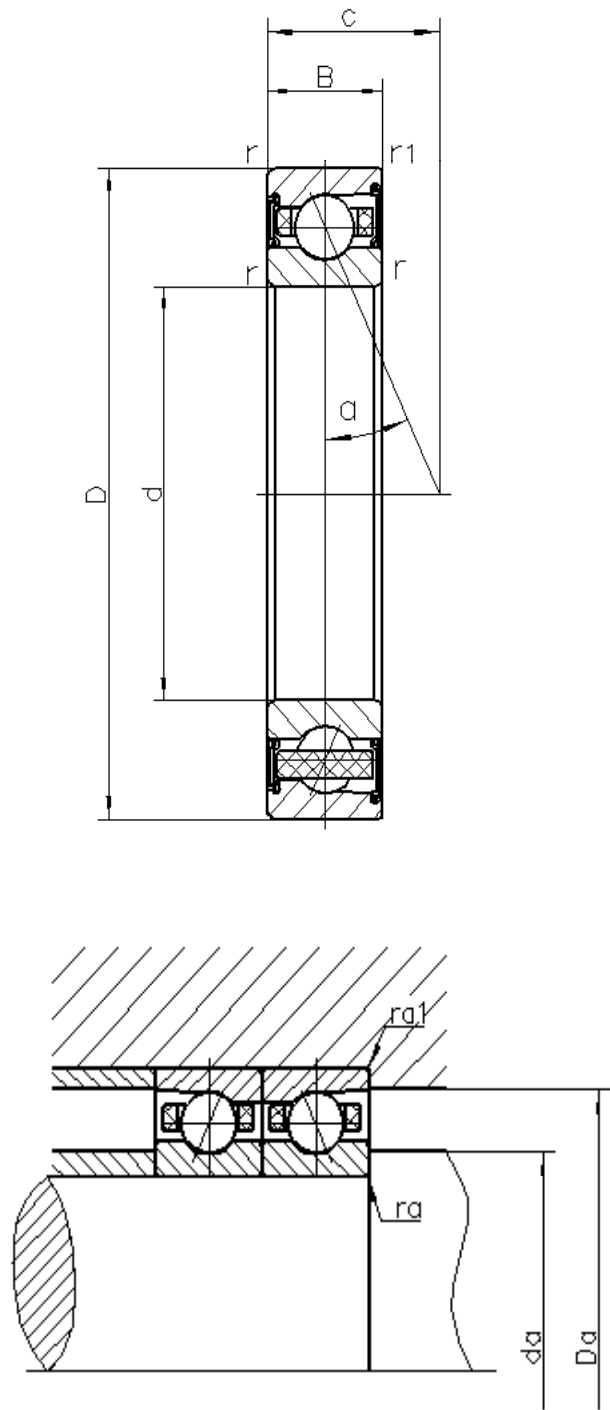

d	12	mm	
D	24	mm	
B	6	mm	
c	7.2	mm	
Da	21.5	mm	Tolerance: H12
da	15	mm	Tolerance: h12
r min	0.3	mm	
r1 min	0.1	mm	
ra max	0.3	mm	
ra1 max	0.1	mm	
α	25°		Contact angle
m	0.011	kg	Mass
Cr	2610	N	Basic dynamic load rating, radial
Cor	1510	N	Basic static load rating, radial
Fv L	11	N	Preload force
Fv M	33	N	Preload force
Fv H	66	N	Preload force
Ca L	23.4	N/um	Axial rigidity
Ca M	35	N/um	Axial rigidity
Ca H	47.6	N/um	Axial rigidity
Limiting speeds	56000	r/min	Lubrication: grease