


PRECISION ANGULAR CONTACT BALL BEARINGS

TYPE 71902C-2RZTA/P4S B71902 C 2RSD T P4S UL
PRECISION P4S

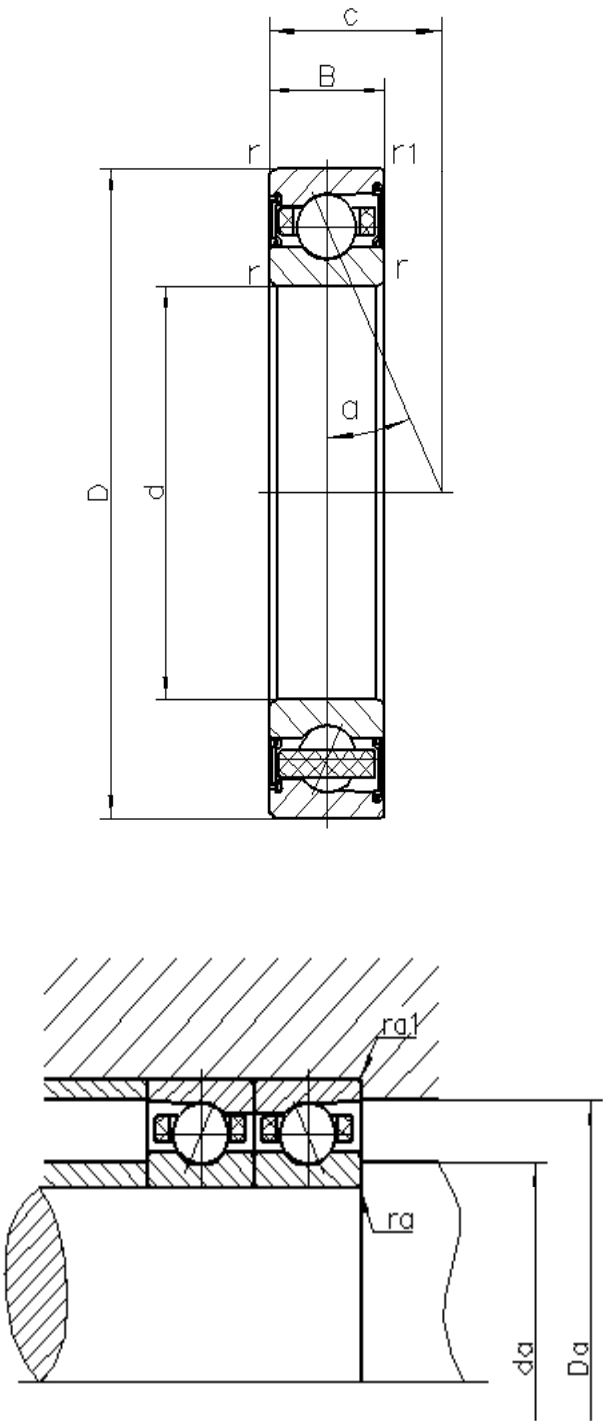

d	15	mm	
D	28	mm	
B	7	mm	
c	6.4	mm	
Da	25.5	mm	Tolerance: H12
da	18	mm	Tolerance: h12
r _{min}	0.3	mm	
r _{l min}	0.1	mm	
ra _{max}	0.3	mm	
ra _{l max}	0.1	mm	
α	15°		Contact angle
m	0.017	kg	Mass
Cr	2930	N	Basic dynamic load rating, radial
Cor	1880	N	Basic static load rating, radial
Fv _L	9	N	Preload force
Fv _M	28	N	Preload force
Fv _H	56	N	Preload force
Ca _L	12.6	N/um	Axial rigidity
Ca _M	18.2	N/um	Axial rigidity
Ca _H	25.6	N/um	Axial rigidity
Limiting speeds	56000	r/min	Lubrication: grease