


PRECISION ANGULAR CONTACT BALL BEARINGS

TYPE 71902AC-2RZTA/P4S B71902 E 2RSD T P4S UL
PRECISION P4S

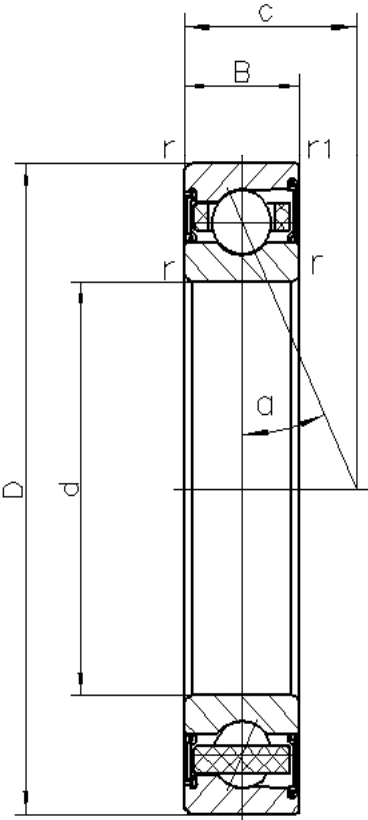

d	15	mm	
D	28	mm	
B	7	mm	
c	8.5	mm	
Da	25.5	mm	Tolerance: H12
da	18	mm	Tolerance: h12
r _{min}	0.3	mm	
r _{l min}	0.1	mm	
ra _{max}	0.3	mm	
ra _{l max}	0.1	mm	
α	25°		Contact angle
m	0.017	kg	Mass
Cr	2770	N	Basic dynamic load rating, radial
Cor	1790	N	Basic static load rating, radial
Fv _L	15	N	Preload force
Fv _M	46	N	Preload force
Fv _H	92	N	Preload force
Ca _L	27.4	N/um	Axial rigidity
Ca _M	44.7	N/um	Axial rigidity
Ca _H	58.9	N/um	Axial rigidity
Limiting speeds	50000	r/min	Lubrication: grease