


PRECISION ANGULAR CONTACT BALL BEARINGS

TYPE 71903C-2RZTA/P4S B71903 C 2RSD T P4S UL
PRECISION P4S

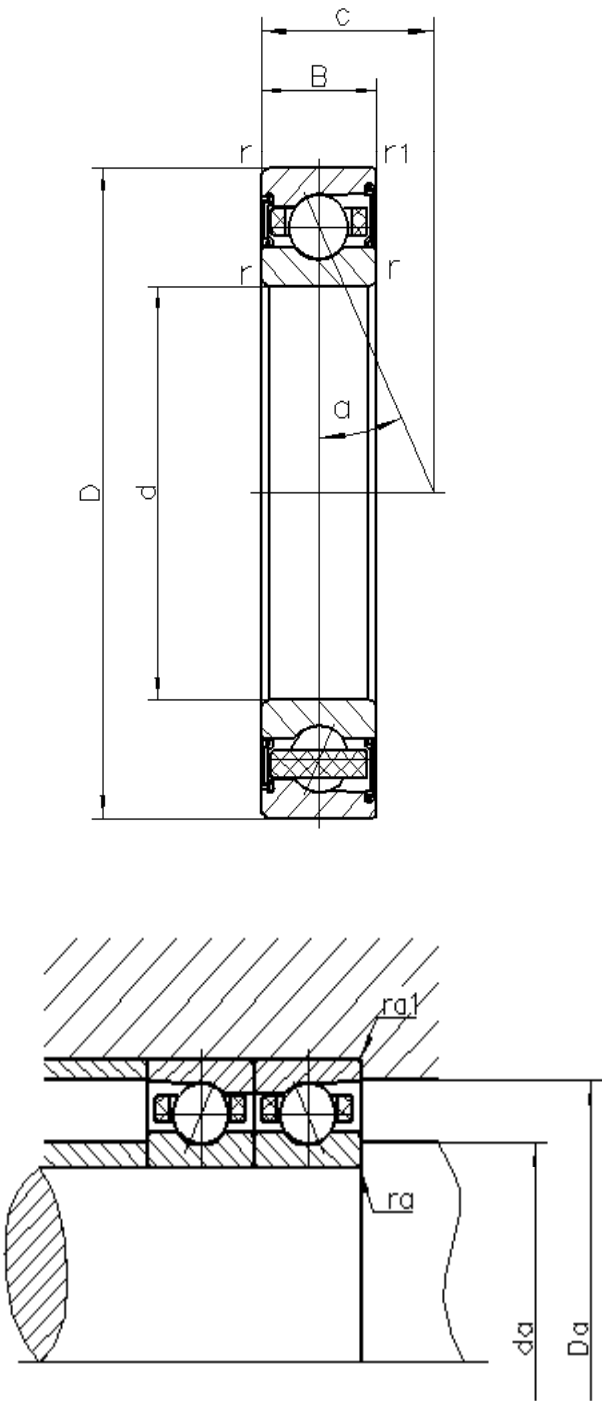

d	17	mm	
D	30	mm	
B	7	mm	
c	6.6	mm	
Da	27.5	mm	Tolerance: H12
da	20	mm	Tolerance: h12
r min	0.3	mm	
r1 min	0.1	mm	
ra max	0.3	mm	
ra1 max	0.1	mm	
α	15°		Contact angle
m	0.019	kg	Mass
Cr	3120	N	Basic dynamic load rating, radial
Cor	2150	N	Basic static load rating, radial
Fv L	10	N	Preload force
Fv M	29	N	Preload force
Fv H	58	N	Preload force
Ca L	13.7	N/um	Axial rigidity
Ca M	19.8	N/um	Axial rigidity
Ca H	27.8	N/um	Axial rigidity
Limiting speeds	50000	r/min	Lubrication: grease