


PRECISION ANGULAR CONTACT BALL BEARINGS

TYPE 71904C-2RZTA/P4S B71904 C 2RSD T P4S UL
PRECISION P4S

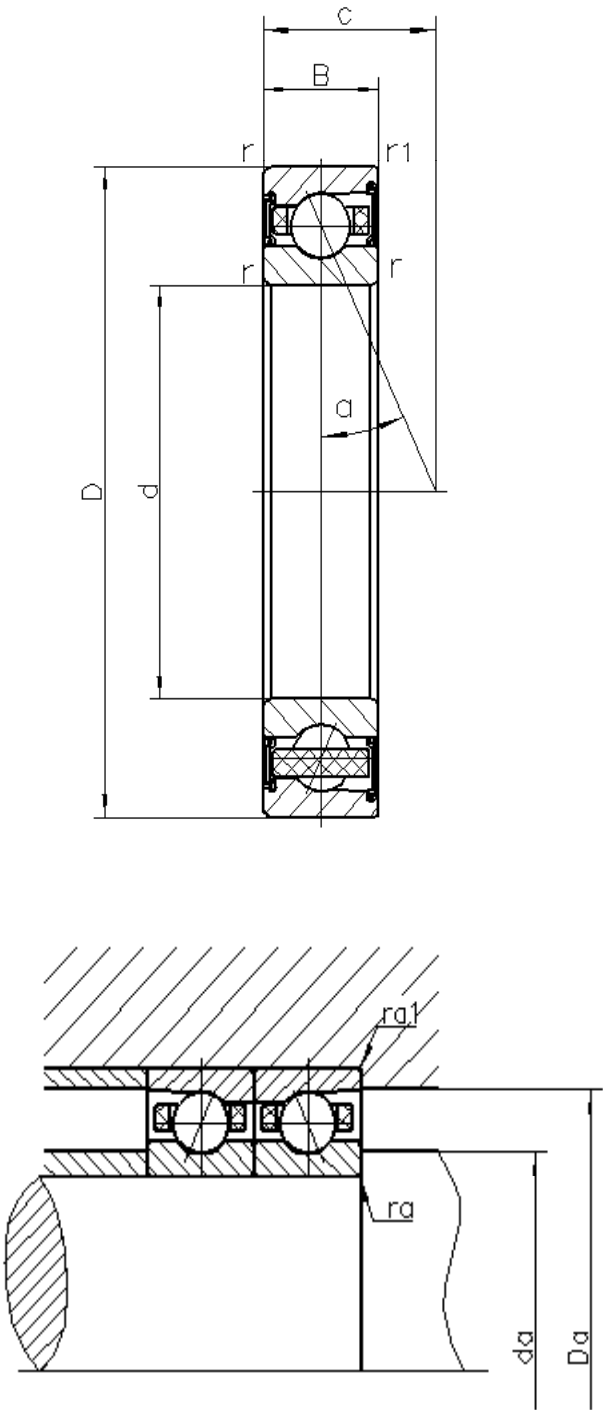

d	20	mm	
D	37	mm	
B	9	mm	
c	8.3	mm	
Da	33.5	mm	Tolerance: H12
da	23.5	mm	Tolerance: h12
r _{min}	0.3	mm	
r1 _{min}	0.15	mm	
ra _{max}	0.3	mm	
ra1 _{max}	0.15	mm	
α	15°		Contact angle
m	0.037	kg	Mass
Cr	7300	N	Basic dynamic load rating, radial
Cor	4560	N	Basic static load rating, radial
Fv _L	39	N	Preload force
Fv _M	78	N	Preload force
Fv _H	150	N	Preload force
Ca _L	24.4	N/um	Axial rigidity
Ca _M	32.9	N/um	Axial rigidity
Ca _H	44.7	N/um	Axial rigidity
Limiting speeds	43000	r/min	Lubrication: grease