


PRECISION ANGULAR CONTACT BALL BEARINGS

TYPE 71906C-2RZTA/P4S B71906 C 2RSD T P4S UL  
PRECISION P4S

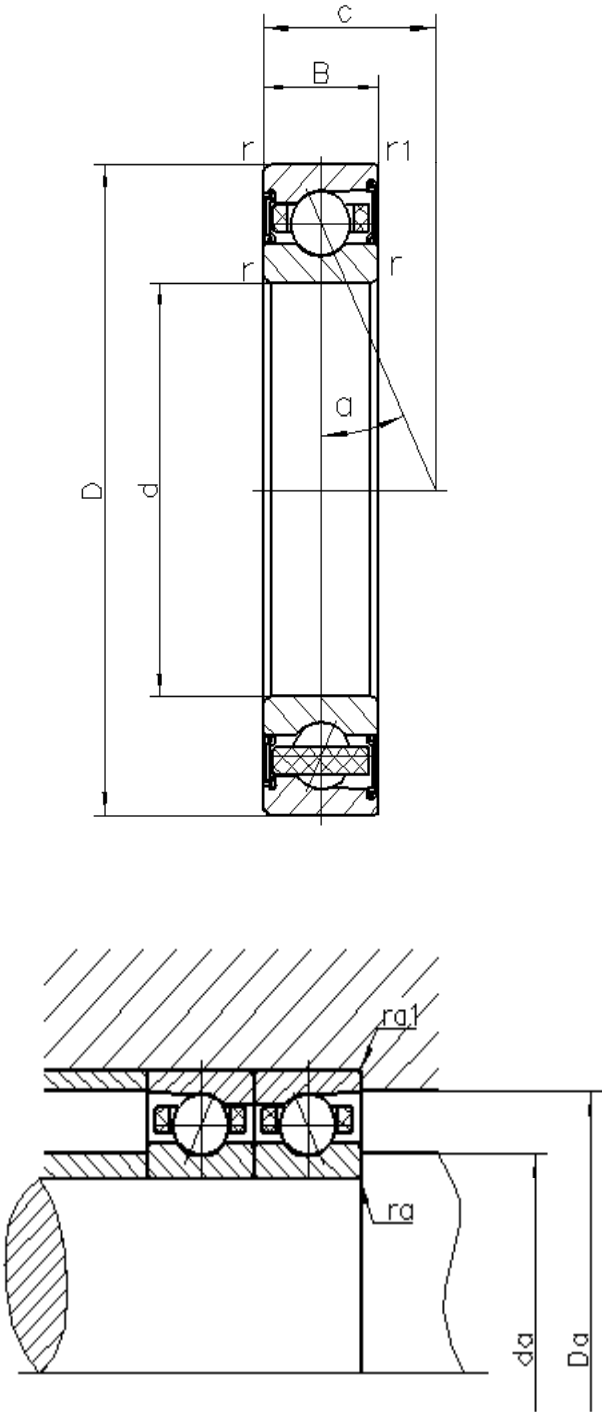

d	30	mm	
D	47	mm	
B	9	mm	
c	9.7	mm	
Da	43	mm	Tolerance: H12
da	34	mm	Tolerance: h12
r <sub>min</sub>	0.6	mm	
r1 <sub>min</sub>	0.3	mm	
ra <sub>max</sub>	0.3	mm	
ra1 <sub>max</sub>	0.3	mm	
α	15°		Contact angle
m	0.05	kg	Mass
Cr	8310	N	Basic dynamic load rating, radial
Cor	6270	N	Basic static load rating, radial
Fv <sub>L</sub>	49	N	Preload force
Fv <sub>M</sub>	100	N	Preload force
Fv <sub>H</sub>	200	N	Preload force
Ca <sub>L</sub>	31.1	N/um	Axial rigidity
Ca <sub>M</sub>	42.3	N/um	Axial rigidity
Ca <sub>H</sub>	58.5	N/um	Axial rigidity
Limiting speeds	30000	r/min	Lubrication: grease