


PRECISION ANGULAR CONTACT BALL BEARINGS

TYPE 71907AC-2RZTA/P4S B71907 E 2RSD T P4S UL
PRECISION P4S

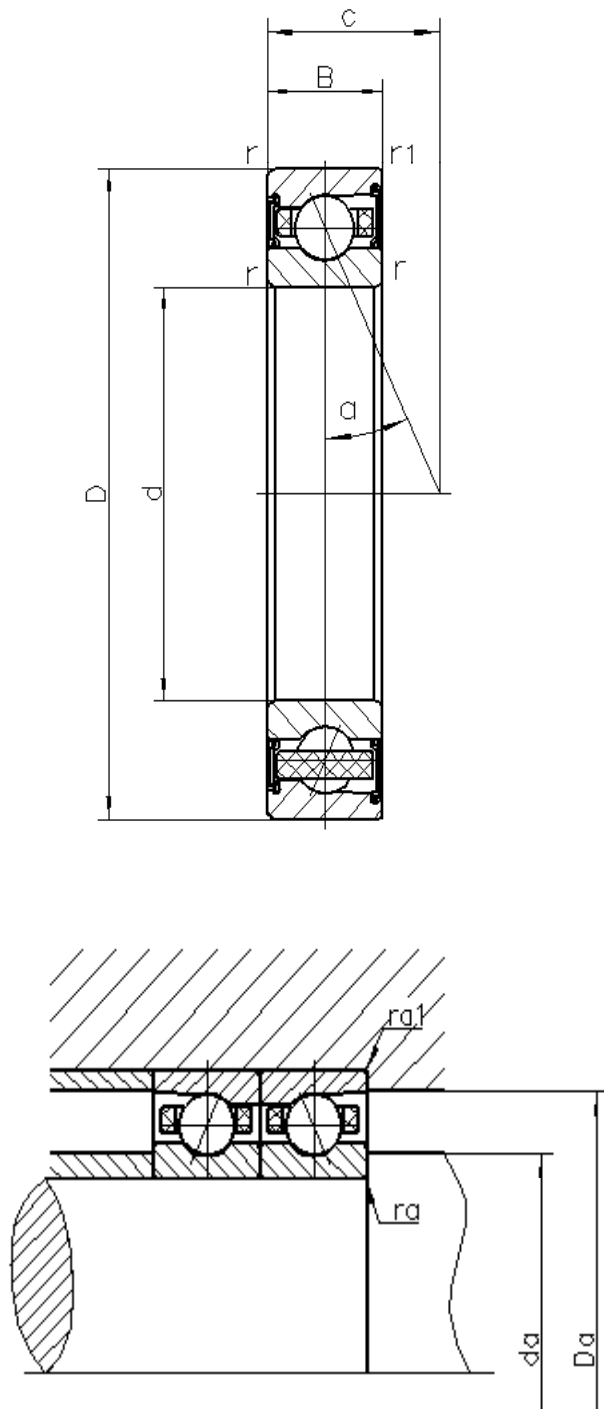

d	35	mm	
D	55	mm	
B	10	mm	
c	15.5	mm	
Da	50.5	mm	Tolerance: H12
da	39.5	mm	Tolerance: h12
r _{min}	0.6	mm	
r _{l min}	0.15	mm	
ra _{max}	0.6	mm	
ra _{l max}	0.15	mm	
α	25°		Contact angle
m	0.077	kg	Mass
Cr	10750	N	Basic dynamic load rating, radial
Cor	8540	N	Basic static load rating, radial
Fv _L	100	N	Preload force
Fv _M	250	N	Preload force
Fv _H	490	N	Preload force
Ca _L	88.6	N/um	Axial rigidity
Ca _M	124.6	N/um	Axial rigidity
Ca _H	162.4	N/um	Axial rigidity
Limiting speeds	22000	r/min	Lubrication: grease