


PRECISION ANGULAR CONTACT BALL BEARINGS

TYPE 71908AC-2RZTA/P4S B71908 E 2RSD T P4S UL  
PRECISION P4S

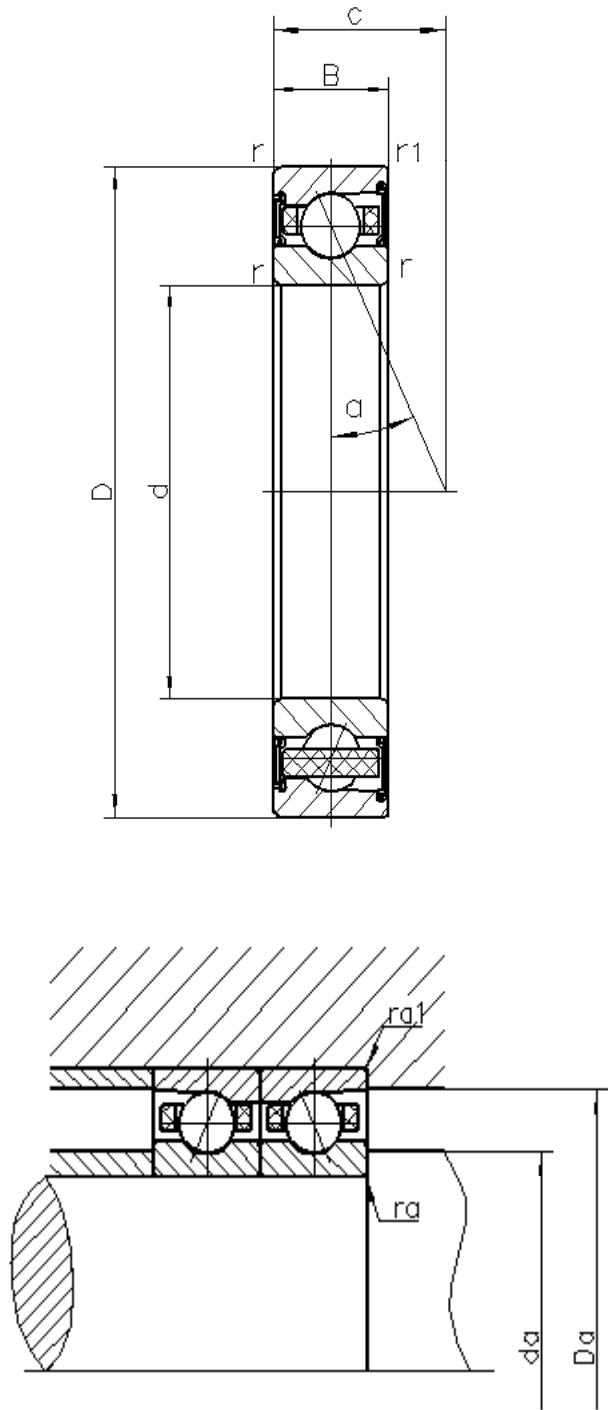

d	40	mm	
D	62	mm	
B	12	mm	
c	17.9	mm	
Da	57.5	mm	Tolerance: H12
da	44.5	mm	Tolerance: h12
r <sub>min</sub>	0.6	mm	
r1 <sub>min</sub>	0.6	mm	
ra <sub>max</sub>	0.6	mm	
ra1 <sub>max</sub>	0.6	mm	
α	25°		Contact angle
m	0.11	kg	Mass
Cr	13690	N	Basic dynamic load rating, radial
Cor	11140	N	Basic static load rating, radial
Fv <sub>L</sub>	120	N	Preload force
Fv <sub>M</sub>	290	N	Preload force
Fv <sub>H</sub>	590	N	Preload force
Ca <sub>L</sub>	98.2	N/um	Axial rigidity
Ca <sub>M</sub>	136.1	N/um	Axial rigidity
Ca <sub>H</sub>	179.6	N/um	Axial rigidity
Limiting speeds	18000	r/min	Lubrication: grease