


PRECISION ANGULAR CONTACT BALL BEARINGS

TYPE 71909C-2RZTA/P4S B71909 C 2RSD T P4S UL
PRECISION P4S

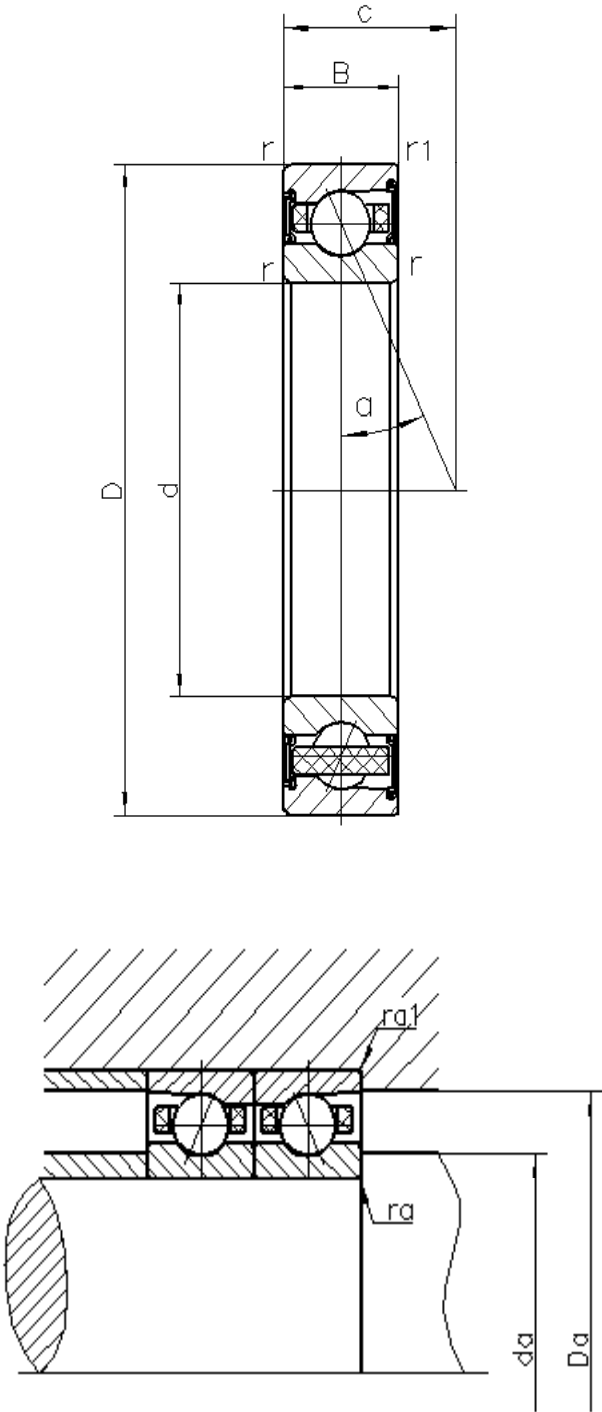

d	45	mm	
D	68	mm	
B	12	mm	
c	13.6	mm	
Da	63	mm	Tolerance: H12
da	50	mm	Tolerance: h12
r min	0.6	mm	
r1 min	0.6	mm	
ra max	0.6	mm	
ra1 max	0.6	mm	
α	15°		Contact angle
m	0.13	kg	Mass
Cr	15190	N	Basic dynamic load rating, radial
Cor	13200	N	Basic static load rating, radial
Fv L	100	N	Preload force
Fv M	200	N	Preload force
Fv H	390	N	Preload force
Ca L	48	N/um	Axial rigidity
Ca M	64.7	N/um	Axial rigidity
Ca H	88.3	N/um	Axial rigidity
Limiting speeds	19000	r/min	Lubrication: grease