


PRECISION ANGULAR CONTACT BALL BEARINGS

TYPE 71909AC-2RZTA/P4S B71909 E 2RSD T P4S UL
PRECISION P4S

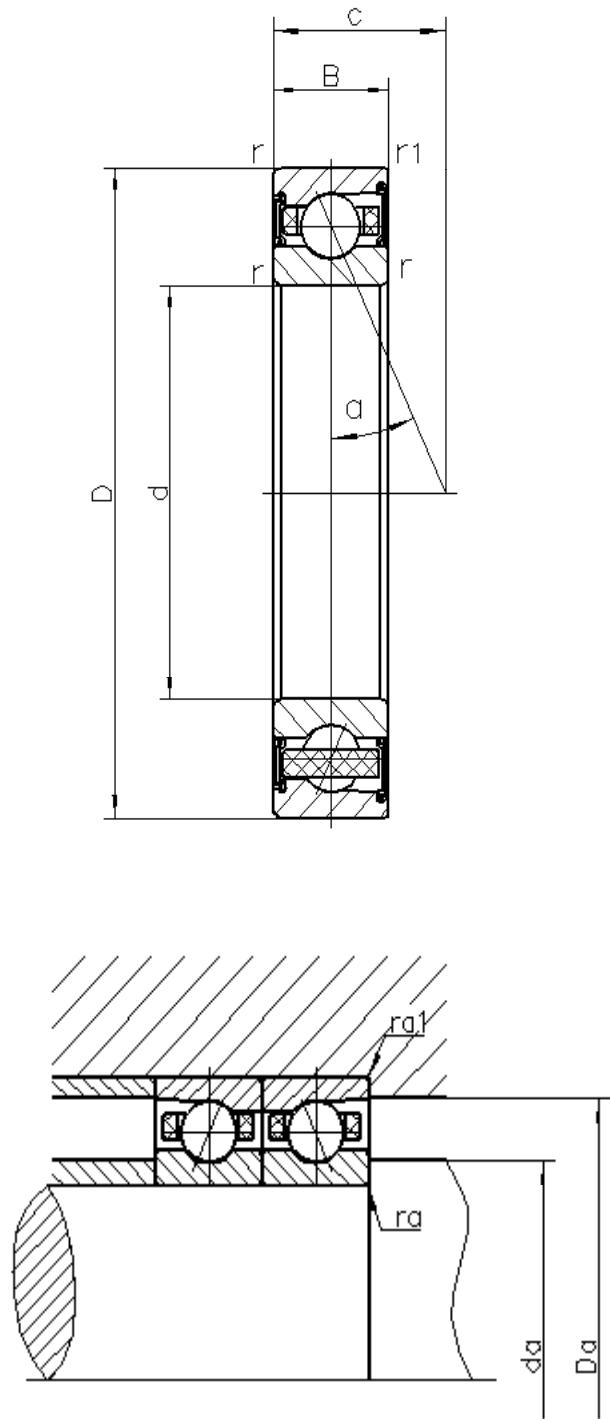

d	45	mm	
D	68	mm	
B	12	mm	
c	19.2	mm	
Da	63	mm	Tolerance: H12
da	50	mm	Tolerance: h12
r _{min}	0.6	mm	
r1 _{min}	0.6	mm	
ra _{max}	0.6	mm	
ra1 _{max}	0.6	mm	
α	25°		Contact angle
m	0.13	kg	Mass
Cr	14340	N	Basic dynamic load rating, radial
Cor	12540	N	Basic static load rating, radial
Fv _L	150	N	Preload force
Fv _M	340	N	Preload force
Fv _H	690	N	Preload force
Ca _L	113.5	N/um	Axial rigidity
Ca _M	153.9	N/um	Axial rigidity
Ca _H	203.1	N/um	Axial rigidity
Limiting speeds	17000	r/min	Lubrication: grease