
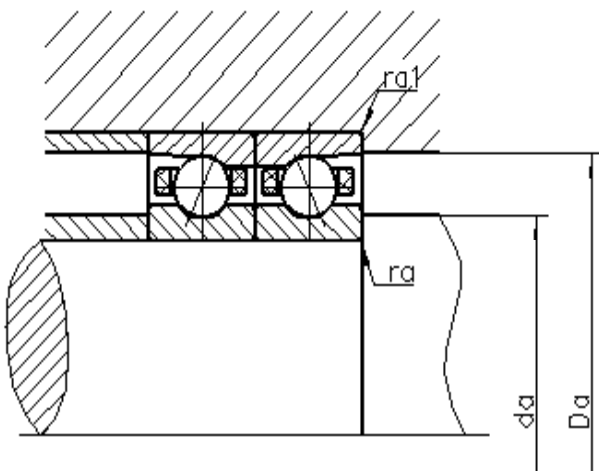


PRECISION ANGULAR CONTACT BALL BEARINGS

TYPE 71910AC-2RZTA/P4S B71910 E 2RSD T P4S UL
PRECISION P4S

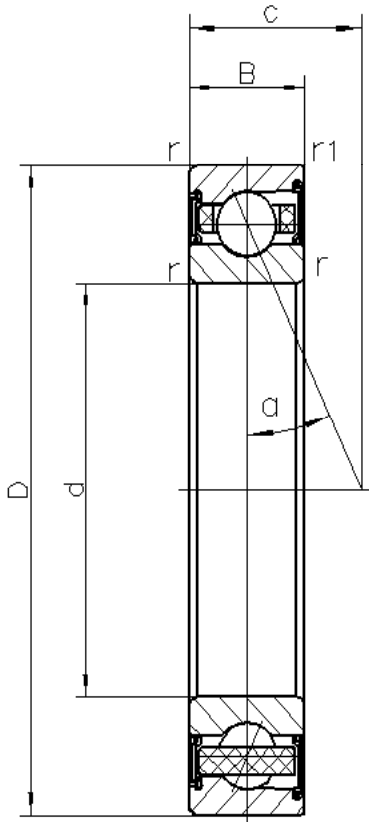

d	50	mm	
D	72	mm	
B	12	mm	
c	20.2	mm	
Da	67	mm	Tolerance: H12
da	55	mm	Tolerance: h12
r _{min}	0.6	mm	
r1 _{min}	0.3	mm	
ra _{max}	0.6	mm	
ra1 _{max}	0.3	mm	
α	25°		Contact angle
m	0.154	kg	Mass
Cr	14110	N	Basic dynamic load rating, radial
Cor	12630	N	Basic static load rating, radial
Fv _L	150	N	Preload force
Fv _M	390	N	Preload force
Fv _H	780	N	Preload force
Ca _L	113.5	N/um	Axial rigidity
Ca _M	162.2	N/um	Axial rigidity
Ca _H	213.5	N/um	Axial rigidity
Limiting speeds	16000	r/min	Lubrication: grease