


PRECISION ANGULAR CONTACT BALL BEARINGS

TYPE 71912C-2RZTA/P4S B71912 C 2RSD T P4S UL
PRECISION P4S

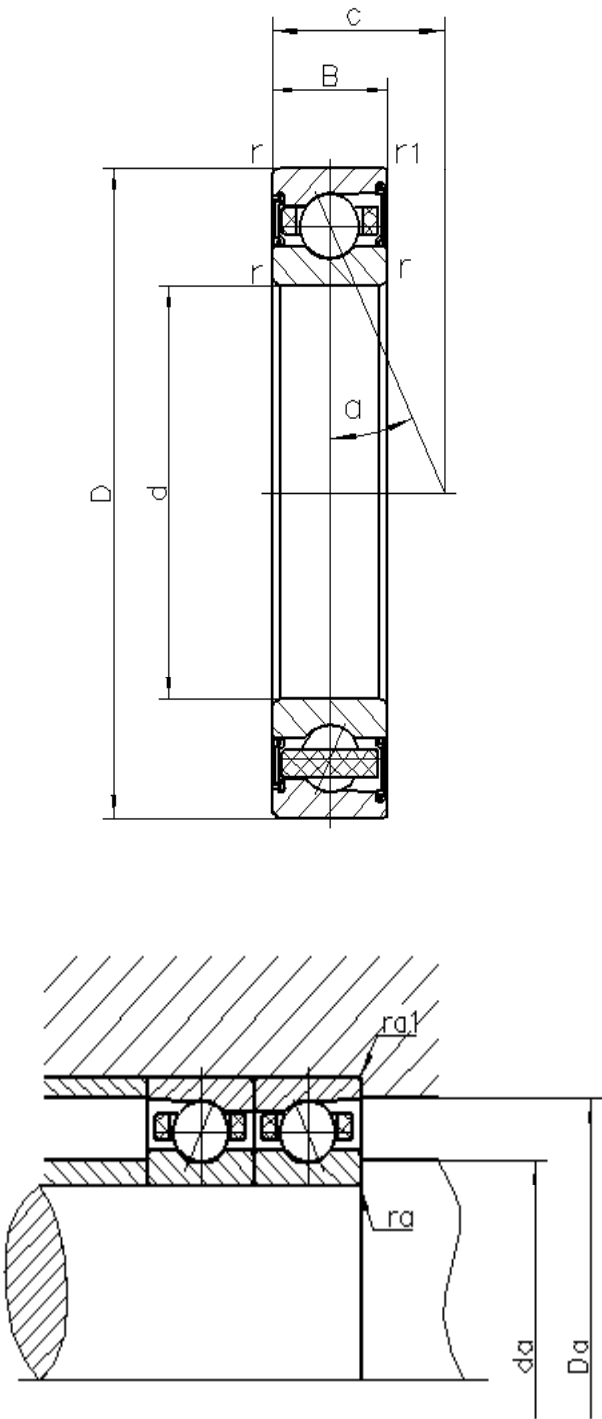

d	60	mm	
D	85	mm	
B	13	mm	
c	16.2	mm	
Da	79	mm	Tolerance: H12
da	66	mm	Tolerance: h12
r _{min}	1	mm	
r _{l min}	0.6	mm	
ra _{max}	0.6	mm	
ra _{l max}	0.6	mm	
α	15°		Contact angle
m	0.188	kg	Mass
Cr	23980	N	Basic dynamic load rating, radial
Cor	22710	N	Basic static load rating, radial
Fv _L	120	N	Preload force
Fv _M	290	N	Preload force
Fv _H	590	N	Preload force
Ca _L	56.9	N/um	Axial rigidity
Ca _M	82.3	N/um	Axial rigidity
Ca _H	113.9	N/um	Axial rigidity
Limiting speeds	15000	r/min	Lubrication: grease