


PRECISION ANGULAR CONTACT BALL BEARINGS

TYPE 71912AC-2RZTA/P4S B71912 E 2RSD T P4S UL
PRECISION P4S

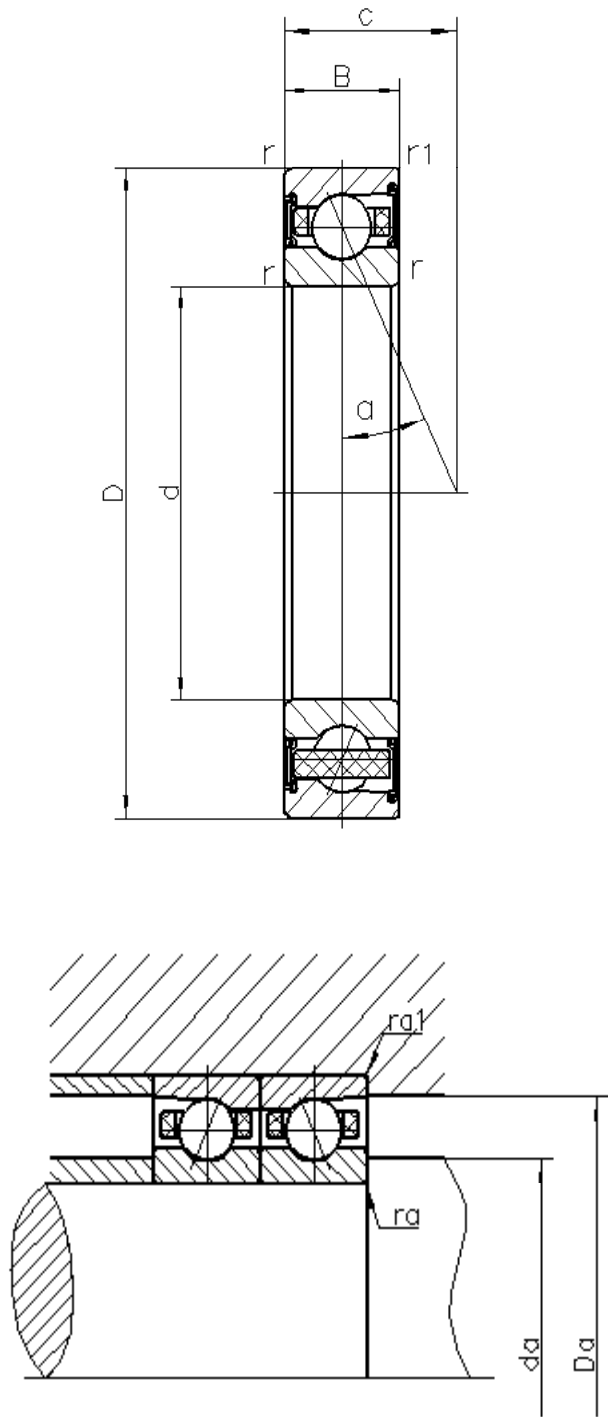

d	60	mm	
D	85	mm	
B	13	mm	
c	23.4	mm	
Da	79	mm	Tolerance: H12
da	66	mm	Tolerance: h12
r _{min}	1	mm	
r1 _{min}	0.6	mm	
ra _{max}	0.6	mm	
ra1 _{max}	0.6	mm	
α	25°		Contact angle
m	0.188	kg	Mass
Cr	22640	N	Basic dynamic load rating, radial
Cor	21550	N	Basic static load rating, radial
Fv _L	200	N	Preload force
Fv _M	440	N	Preload force
Fv _H	880	N	Preload force
Ca _L	142	N/um	Axial rigidity
Ca _M	189.5	N/um	Axial rigidity
Ca _H	247.2	N/um	Axial rigidity
Limiting speeds	14000	r/min	Lubrication: grease