


PRECISION ANGULAR CONTACT BALL BEARINGS

TYPE 7200C-2RZTA/P4S B7200 C 2RSD T P4S UL  
PRECISION P4S

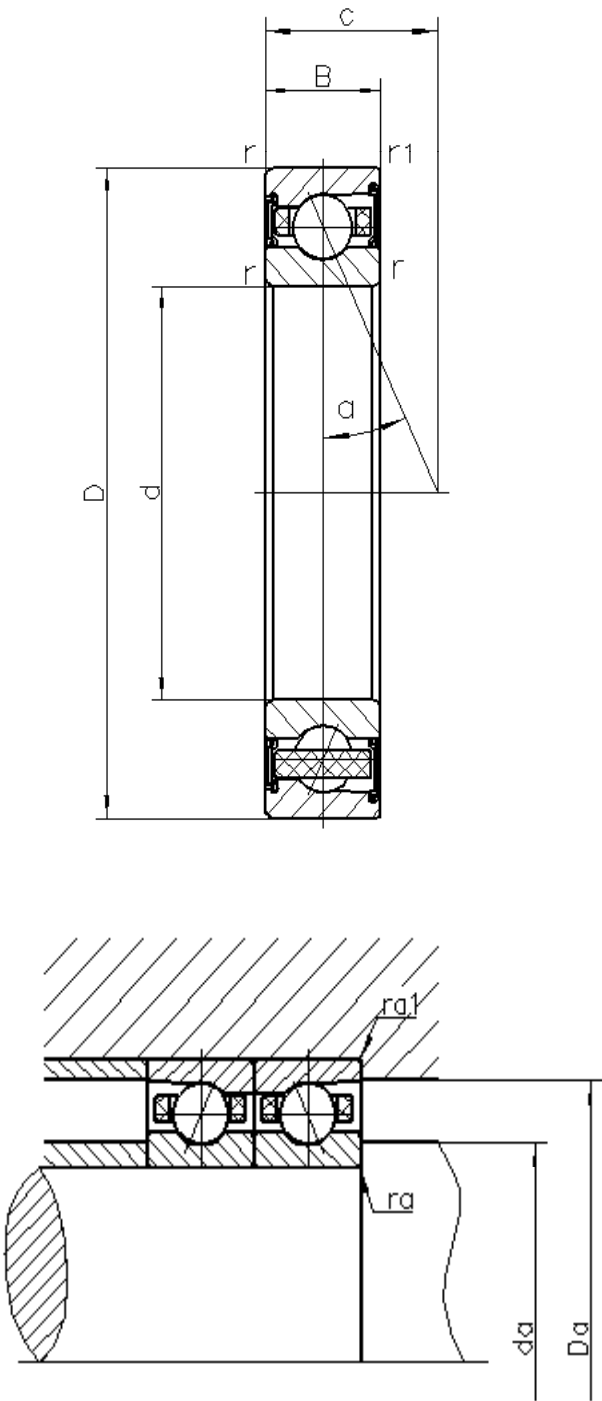

d	10	mm	
D	30	mm	
B	9	mm	
c	7.2	mm	
Da	25.5	mm	Tolerance: H12
da	14.5	mm	Tolerance: h12
r min	0.6	mm	
r1 min	0.3	mm	
ra max	0.6	mm	
ra1 max	0.3	mm	
α	15°		Contact angle
m	0.032	kg	Mass
Cr	5800	N	Basic dynamic load rating, radial
Cor	2890	N	Basic static load rating, radial
Fv L	29	N	Preload force
Fv M	69	N	Preload force
Fv H	150	N	Preload force
Ca L	15.1	N/um	Axial rigidity
Ca M	22.9	N/um	Axial rigidity
Ca H	32.7	N/um	Axial rigidity
Limiting speeds	56000	r/min	Lubrication: grease