


PRECISION ANGULAR CONTACT BALL BEARINGS

TYPE 7201C-2RZTA/P4S B7201 C 2RSD T P4S UL
PRECISION P4S

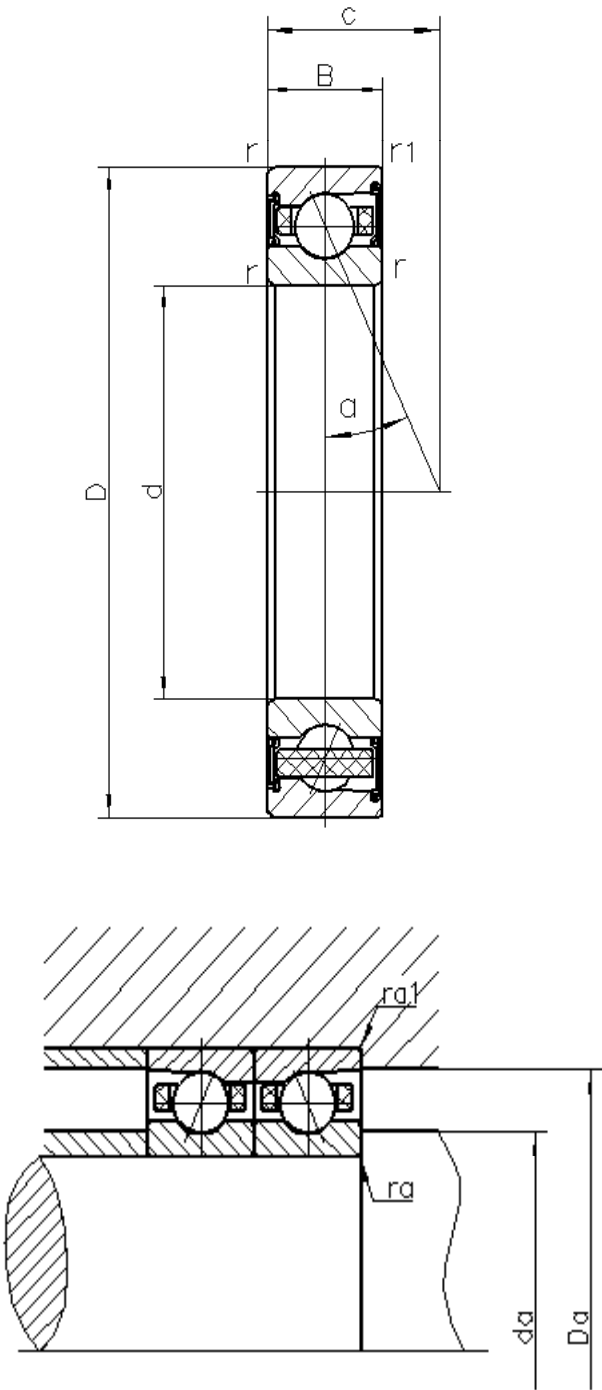

d	12	mm	
D	32	mm	
B	10	mm	
c	7.9	mm	
Da	27.5	mm	Tolerance: H12
da	16.5	mm	Tolerance: h12
r min	0.6	mm	
r1 min	0.3	mm	
ra max	0.6	mm	
ra1 max	0.3	mm	
α	15°		Contact angle
m	0.037	kg	Mass
Cr	7080	N	Basic dynamic load rating, radial
Cor	3470	N	Basic static load rating, radial
Fv L	39	N	Preload force
Fv M	100	N	Preload force
Fv H	200	N	Preload force
Ca L	19.3	N/um	Axial rigidity
Ca M	29.4	N/um	Axial rigidity
Ca H	41.3	N/um	Axial rigidity
Limiting speeds	50000	r/min	Lubrication: grease