


PRECISION ANGULAR CONTACT BALL BEARINGS

TYPE 7202C-2RZTA/P4S B7202 C 2RSD T P4S UL
PRECISION P4S

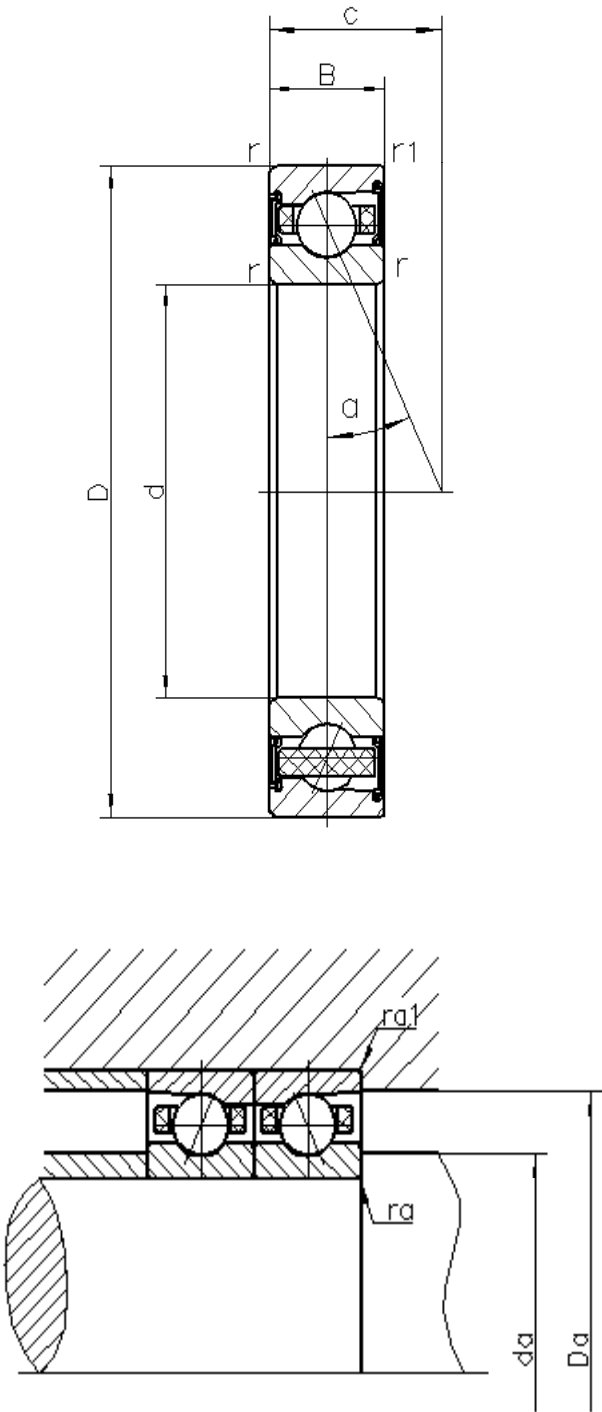

d	15	mm	
D	35	mm	
B	11	mm	
c	8.9	mm	
Da	31	mm	Tolerance: H12
da	19.5	mm	Tolerance: h12
r min	0.6	mm	
r1 min	0.3	mm	
ra max	0.6	mm	
ra1 max	0.3	mm	
α	15°		Contact angle
m	0.044	kg	Mass
Cr	8680	N	Basic dynamic load rating, radial
Cor	4560	N	Basic static load rating, radial
Fv L	39	N	Preload force
Fv M	100	N	Preload force
Fv H	200	N	Preload force
Ca L	20.8	N/um	Axial rigidity
Ca M	31.3	N/um	Axial rigidity
Ca H	43.5	N/um	Axial rigidity
Limiting speeds	48000	r/min	Lubrication: grease