


PRECISION ANGULAR CONTACT BALL BEARINGS

TYPE 7202AC-2RZTA/P4S B7202 E 2RSD T P4S UL
PRECISION P4S

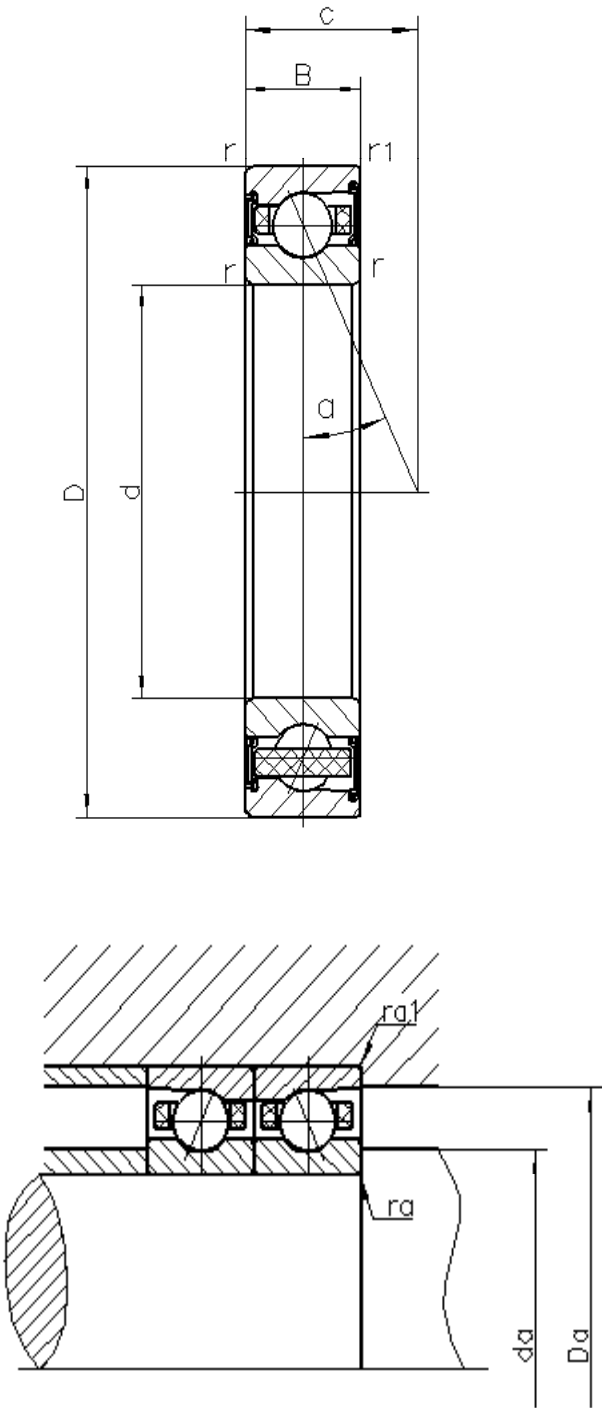

d	15	mm	
D	35	mm	
B	11	mm	
c	11.4	mm	
Da	31	mm	Tolerance: H12
da	19.5	mm	Tolerance: h12
r _{min}	0.6	mm	
r _{l min}	0.3	mm	
ra _{max}	0.6	mm	
ra _{l max}	0.3	mm	
α	25°		Contact angle
m	0.044	kg	Mass
Cr	8350	N	Basic dynamic load rating, radial
Cor	4390	N	Basic static load rating, radial
Fv _L	69	N	Preload force
Fv _M	200	N	Preload force
Fv _H	390	N	Preload force
Ca _L	52.4	N/um	Axial rigidity
Ca _M	78.2	N/um	Axial rigidity
Ca _H	102.4	N/um	Axial rigidity
Limiting speeds	43000	r/min	Lubrication: grease