
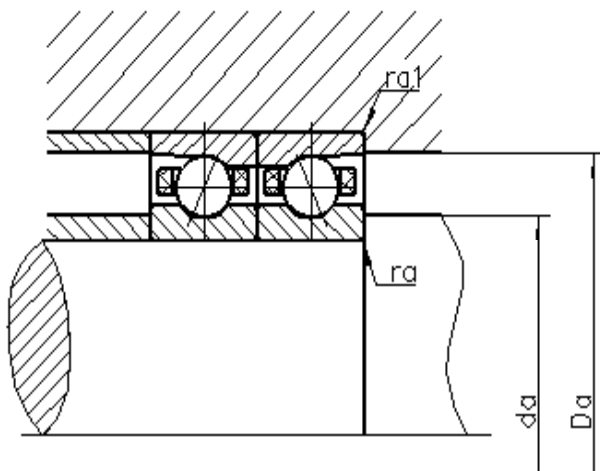


PRECISION ANGULAR CONTACT BALL BEARINGS

TYPE 7203C-2RZTA/P4S B7203 C 2RSD T P4S UL
PRECISION P4S

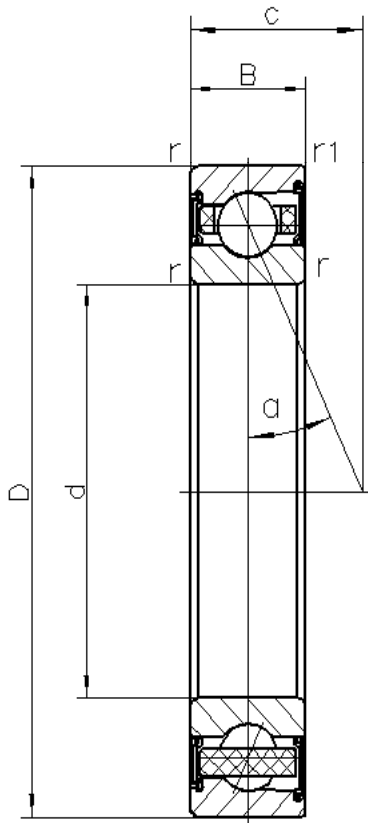

d	17	mm	
D	40	mm	
B	12	mm	
c	9.9	mm	
Da	35.5	mm	Tolerance: H12
da	22	mm	Tolerance: h12
r _{min}	0.6	mm	
r _{l min}	0.3	mm	
ra _{max}	0.6	mm	
ra _{l max}	0.3	mm	
α	15°		Contact angle
m	0.063	kg	Mass
Cr	10880	N	Basic dynamic load rating, radial
Cor	5870	N	Basic static load rating, radial
Fv _L	49	N	Preload force
Fv _M	150	N	Preload force
Fv _H	290	N	Preload force
Ca _L	23.4	N/um	Axial rigidity
Ca _M	38.1	N/um	Axial rigidity
Ca _H	52.3	N/um	Axial rigidity
Limiting speeds	43000	r/min	Lubrication: grease