


PRECISION ANGULAR CONTACT BALL BEARINGS

TYPE 7203AC-2RZTA/P4S B7203 E 2RSD T P4S UL  
PRECISION P4S

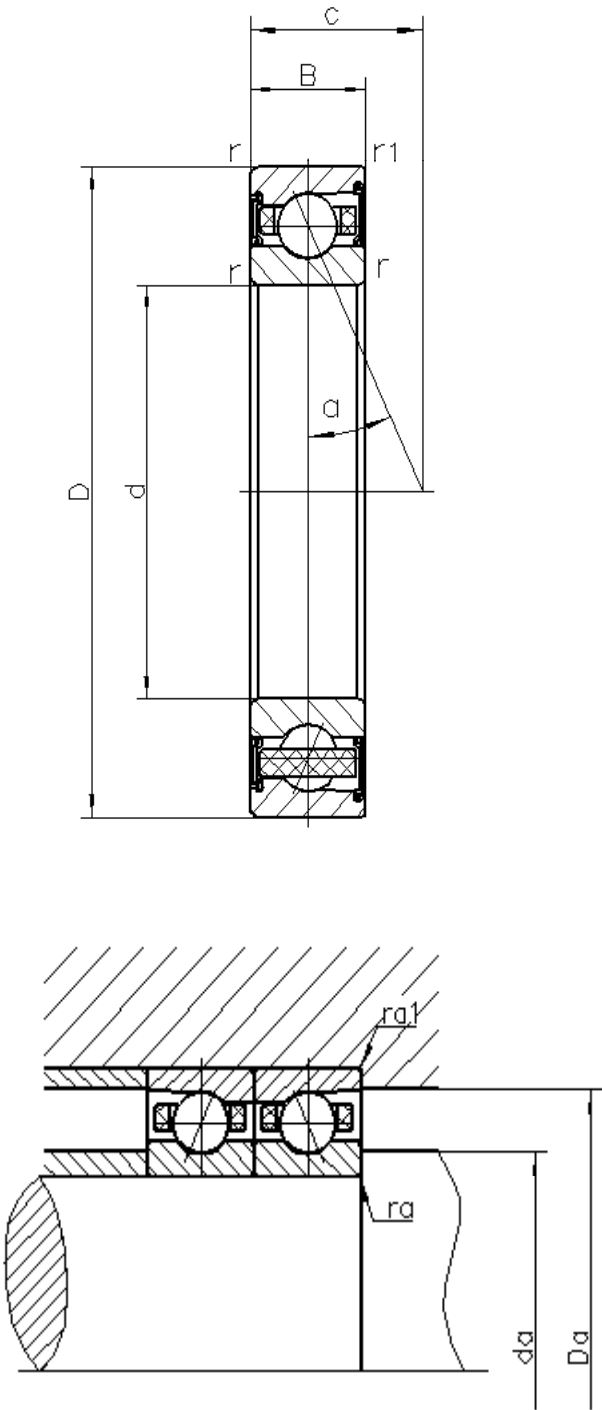

d	17	mm	
D	40	mm	
B	12	mm	
c	12.8	mm	
Da	35.5	mm	Tolerance: H12
da	22	mm	Tolerance: h12
r min	0.6	mm	
r1 min	0.3	mm	
ra max	0.6	mm	
ra1 max	0.3	mm	
α	25°		Contact angle
m	0.063	kg	Mass
Cr	10460	N	Basic dynamic load rating, radial
Cor	5650	N	Basic static load rating, radial
Fv L	78	N	Preload force
Fv M	200	N	Preload force
Fv H	390	N	Preload force
Ca L	56.6	N/um	Axial rigidity
Ca M	80.4	N/um	Axial rigidity
Ca H	104.7	N/um	Axial rigidity
Limiting speeds	38000	r/min	Lubrication: grease