
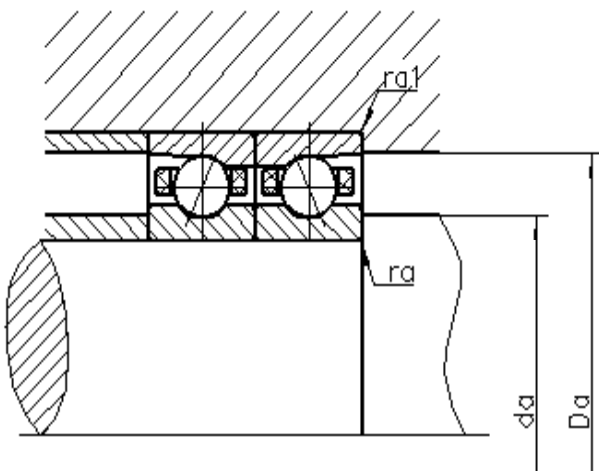


PRECISION ANGULAR CONTACT BALL BEARINGS

TYPE 7204AC-2RZTA/P4S B7204 E 2RSD T P4S UL
PRECISION P4S

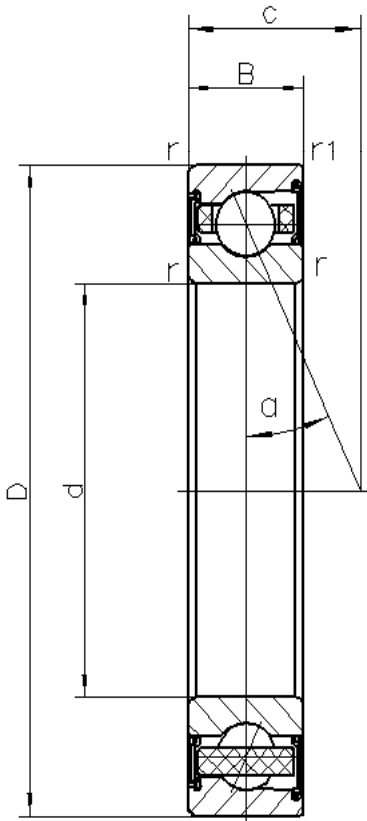

| | | | |
|--------------------|-------|-------|-----------------------------------|
| d | 20 | mm | |
| D | 47 | mm | |
| B | 14 | mm | |
| c | 15 | mm | |
| Da | 41.5 | mm | Tolerance: H12 |
| da | 26 | mm | Tolerance: h12 |
| r _{min} | 1 | mm | |
| r1 _{min} | 0.6 | mm | |
| ra _{max} | 1 | mm | |
| ra1 _{max} | 0.6 | mm | |
| α | 25° | | Contact angle |
| m | 0.103 | kg | Mass |
| Cr | 14950 | N | Basic dynamic load rating, radial |
| Cor | 8630 | N | Basic static load rating, radial |
| Fv _L | 120 | N | Preload force |
| Fv _M | 290 | N | Preload force |
| Fv _H | 590 | N | Preload force |
| Ca _L | 73.6 | N/um | Axial rigidity |
| Ca _M | 102.2 | N/um | Axial rigidity |
| Ca _H | 135.1 | N/um | Axial rigidity |
| Limiting speeds | 32000 | r/min | Lubrication: grease |