


PRECISION ANGULAR CONTACT BALL BEARINGS

TYPE 7206C-2RZTA/P4S B7206 C 2RSD T P4S UL  
PRECISION P4S

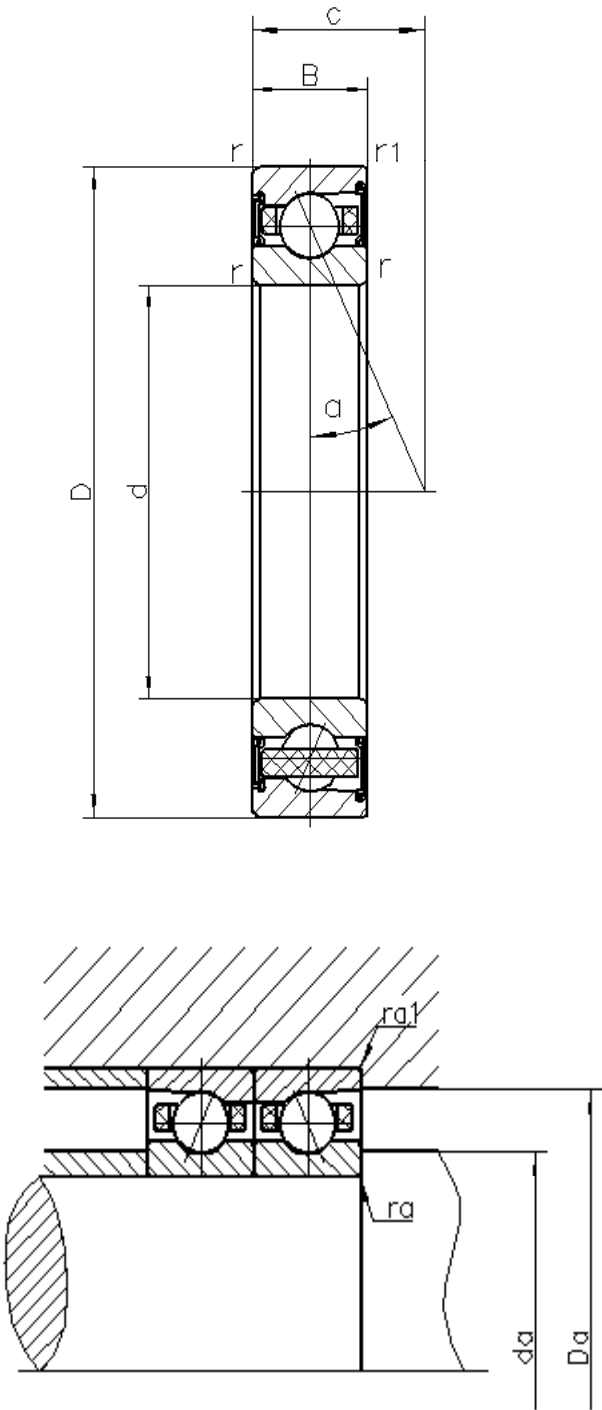

d	30	mm	
D	62	mm	
B	16	mm	
c	14.2	mm	
Da	56	mm	Tolerance: H12
da	36	mm	Tolerance: h12
r <sub>min</sub>	1	mm	
r1 <sub>min</sub>	0.6	mm	
ra <sub>max</sub>	1	mm	
ra1 <sub>max</sub>	0.6	mm	
α	15°		Contact angle
m	0.202	kg	Mass
Cr	23040	N	Basic dynamic load rating, radial
Cor	14770	N	Basic static load rating, radial
Fv <sub>L</sub>	120	N	Preload force
Fv <sub>M</sub>	290	N	Preload force
Fv <sub>H</sub>	590	N	Preload force
Ca <sub>L</sub>	40	N/um	Axial rigidity
Ca <sub>M</sub>	58.5	N/um	Axial rigidity
Ca <sub>H</sub>	81.8	N/um	Axial rigidity
Limiting speeds	24000	r/min	Lubrication: grease