
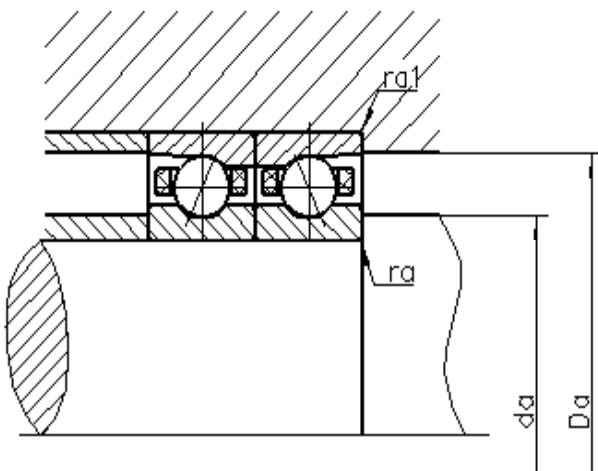


PRECISION ANGULAR CONTACT BALL BEARINGS

TYPE 7206AC-2RZTA/P4S B7206 E 2RSD T P4S UL
PRECISION P4S

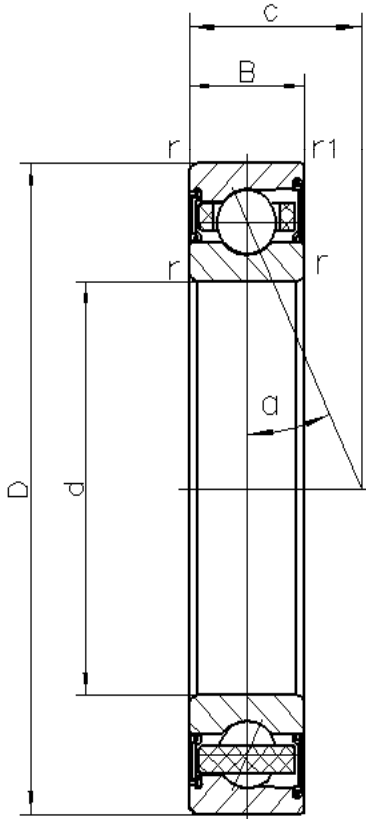

d	30	mm	
D	62	mm	
B	16	mm	
c	18.8	mm	
Da	56	mm	Tolerance: H12
da	36	mm	Tolerance: h12
r _{min}	1	mm	
r1 _{min}	0.6	mm	
ra _{max}	1	mm	
ra1 _{max}	0.6	mm	
α	25°		Contact angle
m	0.202	kg	Mass
Cr	22040	N	Basic dynamic load rating, radial
Cor	14100	N	Basic static load rating, radial
Fv _L	200	N	Preload force
Fv _M	440	N	Preload force
Fv _H	880	N	Preload force
Ca _L	98.4	N/um	Axial rigidity
Ca _M	132	N/um	Axial rigidity
Ca _H	173.2	N/um	Axial rigidity
Limiting speeds	20000	r/min	Lubrication: grease