


PRECISION ANGULAR CONTACT BALL BEARINGS

TYPE 7207C-2RZTA/P4S B7207 C 2RSD T P4S UL
PRECISION P4S

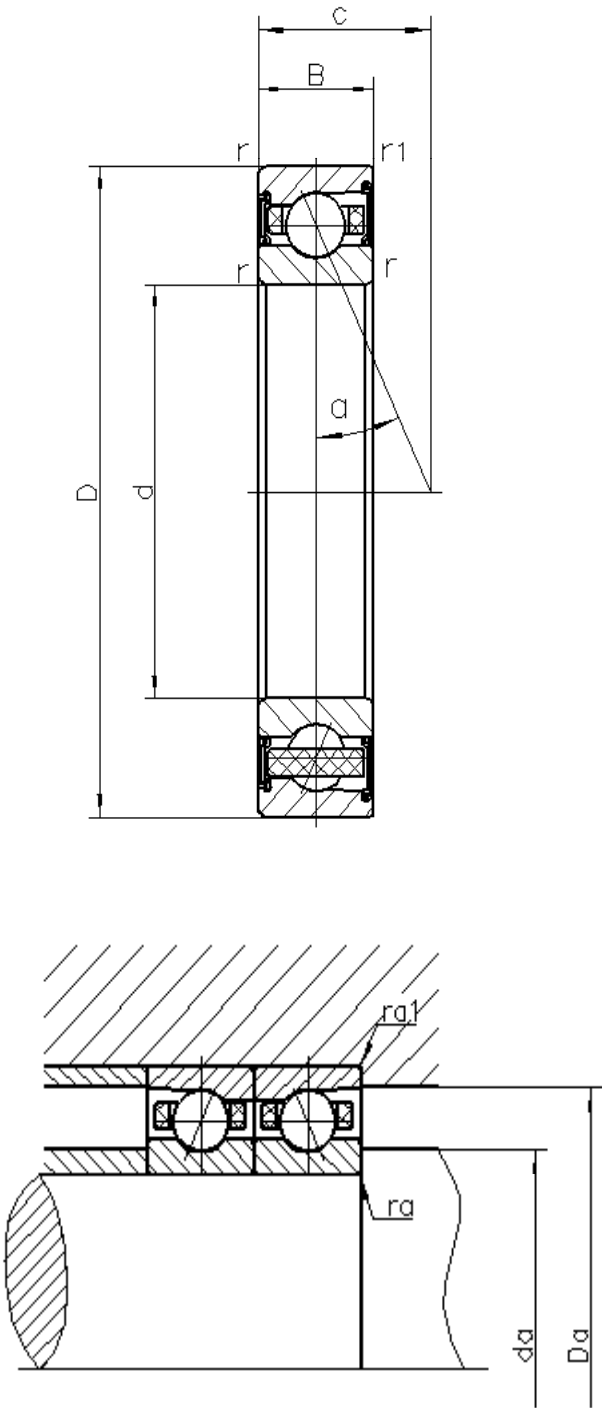

d	35	mm	
D	72	mm	
B	17	mm	
c	15.7	mm	
Da	65	mm	Tolerance: H12
da	42	mm	Tolerance: h12
r min	1.1	mm	
r1 min	0.6	mm	
ra max	1	mm	
ra1 max	0.6	mm	
α	15°		Contact angle
m	0.301	kg	Mass
Cr	30390	N	Basic dynamic load rating, radial
Cor	20010	N	Basic static load rating, radial
Fv L	150	N	Preload force
Fv M	390	N	Preload force
Fv H	780	N	Preload force
Ca L	45	N/um	Axial rigidity
Ca M	67.8	N/um	Axial rigidity
Ca H	94.1	N/um	Axial rigidity
Limiting speeds	20000	r/min	Lubrication: grease