
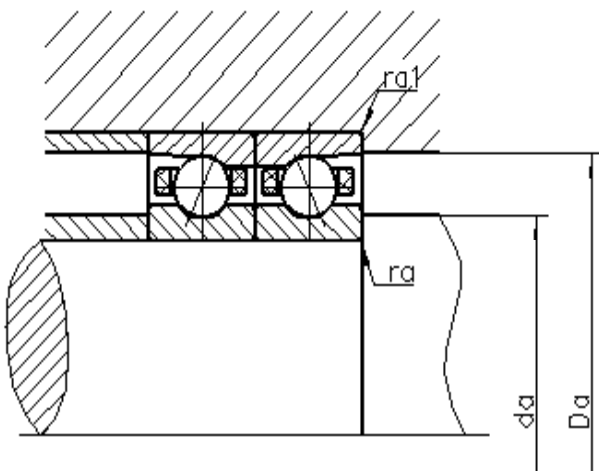


PRECISION ANGULAR CONTACT BALL BEARINGS

TYPE 7208AC-2RZTA/P4S B7208 E 2RSD T P4S UL
PRECISION P4S

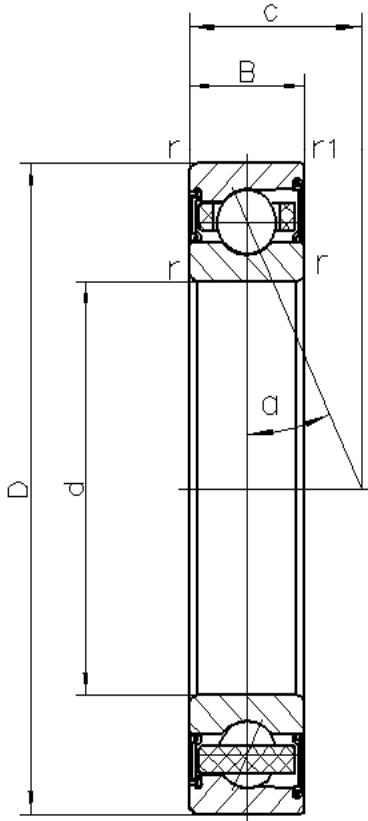

d	40	mm	
D	80	mm	
B	18	mm	
c	23	mm	
Da	73	mm	Tolerance: H12
da	47	mm	Tolerance: h12
r _{min}	1.1	mm	
r1 _{min}	0.6	mm	
ra _{max}	1	mm	
ra1 _{max}	0.6	mm	
α	25°		Contact angle
m	0.372	kg	Mass
Cr	34710	N	Basic dynamic load rating, radial
Cor	24060	N	Basic static load rating, radial
Fv _L	290	N	Preload force
Fv _M	740	N	Preload force
Fv _H	1470	N	Preload force
Ca _L	126	N/um	Axial rigidity
Ca _M	178.3	N/um	Axial rigidity
Ca _H	233.4	N/um	Axial rigidity
Limiting speeds	16000	r/min	Lubrication: grease