
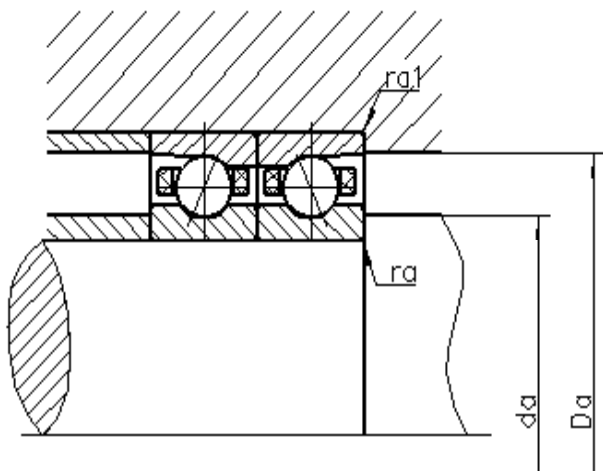


PRECISION ANGULAR CONTACT BALL BEARINGS

TYPE 7209C-2RZTA/P4S B7209 C 2RSD T P4S UL
PRECISION P4S

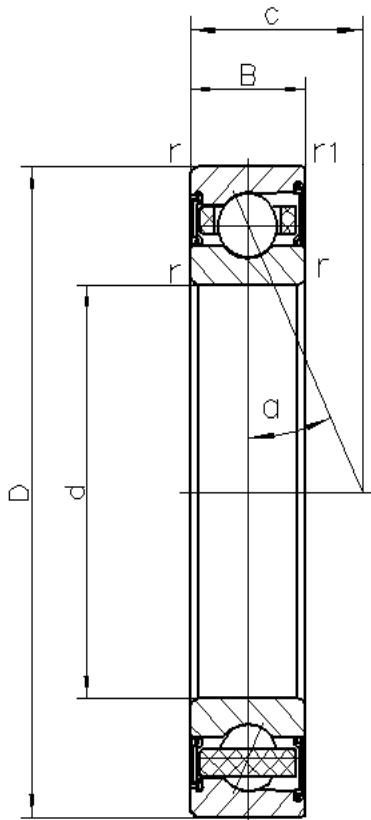

d	45	mm	
D	85	mm	
B	19	mm	
c	18.3	mm	
Da	78	mm	Tolerance: H12
da	52	mm	Tolerance: h12
r _{min}	1.1	mm	
r _{l min}	0.6	mm	
ra _{max}	1	mm	
ra _{l max}	0.6	mm	
α	15°		Contact angle
m	0.423	kg	Mass
Cr	38100	N	Basic dynamic load rating, radial
Cor	27930	N	Basic static load rating, radial
Fv _L	250	N	Preload force
Fv _M	540	N	Preload force
Fv _H	1080	N	Preload force
Ca _L	61.6	N/um	Axial rigidity
Ca _M	86.1	N/um	Axial rigidity
Ca _H	119.6	N/um	Axial rigidity
Limiting speeds	17000	r/min	Lubrication: grease