


PRECISION ANGULAR CONTACT BALL BEARINGS

TYPE 7210C-2RZTA/P4S B7210 C 2RSD T P4S UL
PRECISION P4S

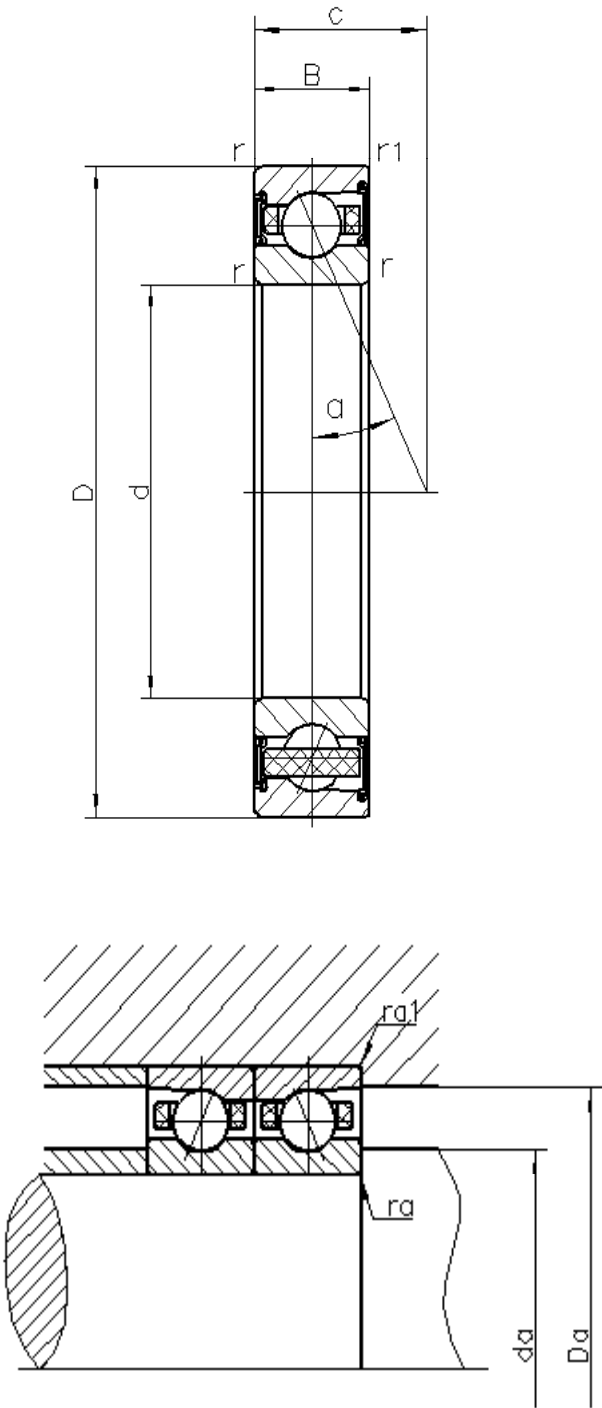

d	50	mm	
D	90	mm	
B	20	mm	
c	19.4	mm	
Da	83	mm	Tolerance: H12
da	57	mm	Tolerance: h12
r min	1.1	mm	
r1 min	0.6	mm	
ra max	1	mm	
ra1 max	0.6	mm	
α	15°		Contact angle
m	0.446	kg	Mass
Cr	42800	N	Basic dynamic load rating, radial
Cor	31720	N	Basic static load rating, radial
Fv L	250	N	Preload force
Fv M	590	N	Preload force
Fv H	1180	N	Preload force
Ca L	62.3	N/um	Axial rigidity
Ca M	90.2	N/um	Axial rigidity
Ca H	125	N/um	Axial rigidity
Limiting speeds	16000	r/min	Lubrication: grease