
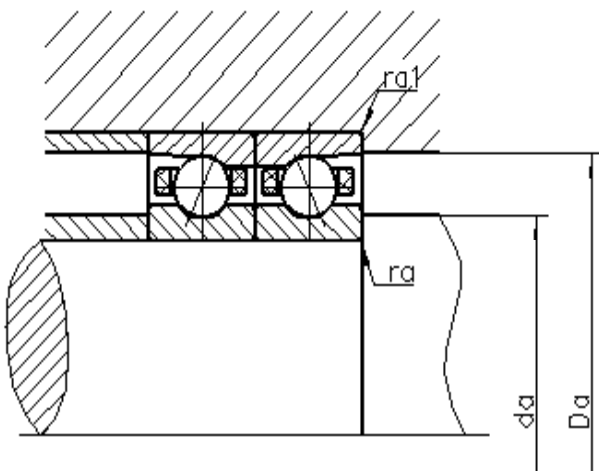


PRECISION ANGULAR CONTACT BALL BEARINGS

TYPE 7210AC-2RZTA/P4S B7210 E 2RSD T P4S UL
PRECISION P4S

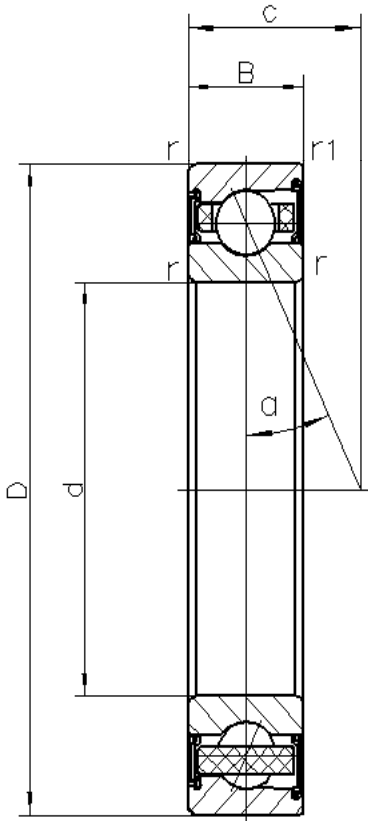

d	50	mm	
D	90	mm	
B	20	mm	
c	26.3	mm	
Da	83	mm	Tolerance: H12
da	57	mm	Tolerance: h12
r min	1.1	mm	
r1 min	0.6	mm	
ra max	1	mm	
ra1 max	0.6	mm	
α	25°		Contact angle
m	0.446	kg	Mass
Cr	40820	N	Basic dynamic load rating, radial
Cor	30310	N	Basic static load rating, radial
Fv L	390	N	Preload force
Fv M	980	N	Preload force
Fv H	1960	N	Preload force
Ca L	149.8	N/um	Axial rigidity
Ca M	211.1	N/um	Axial rigidity
Ca H	277.5	N/um	Axial rigidity
Limiting speeds	14000	r/min	Lubrication: grease