
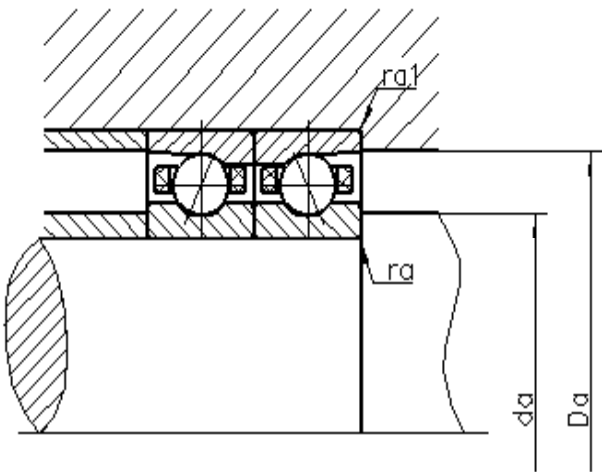


PRECISION ANGULAR CONTACT BALL BEARINGS

TYPE 7211AC-2RZTA/P4S B7211 E 2RSD T P4S UL
PRECISION P4S

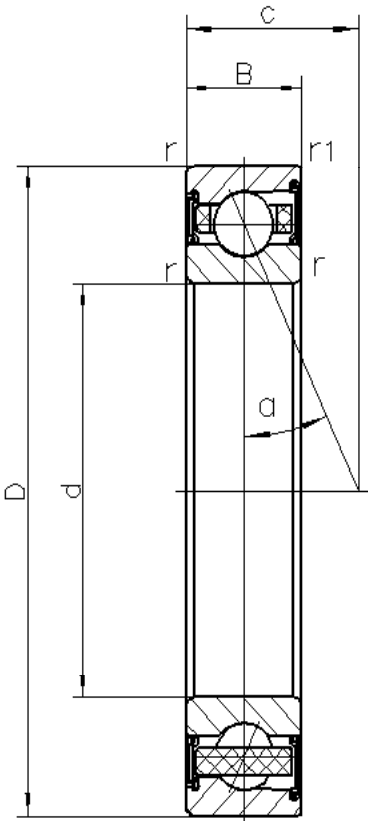

d	55	mm	
D	100	mm	
B	21	mm	
c	28.6	mm	
Da	91	mm	Tolerance: H12
da	64	mm	Tolerance: h12
r _{min}	1.5	mm	
r1 _{min}	0.6	mm	
ra _{max}	1.5	mm	
ra1 _{max}	0.6	mm	
α	25°		Contact angle
m	0.617	kg	Mass
Cr	50510	N	Basic dynamic load rating, radial
Cor	38230	N	Basic static load rating, radial
Fv _L	490	N	Preload force
Fv _M	1180	N	Preload force
Fv _H	2350	N	Preload force
Ca _L	168.1	N/um	Axial rigidity
Ca _M	233	N/um	Axial rigidity
Ca _H	305.4	N/um	Axial rigidity
Limiting speeds	13000	r/min	Lubrication: grease