
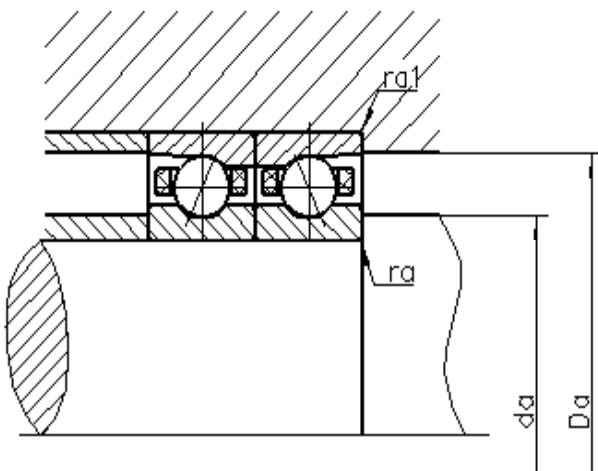


PRECISION ANGULAR CONTACT BALL BEARINGS

TYPE 7212C-2RZTA/P4S B7212 C 2RSD T P4S UL
PRECISION P4S

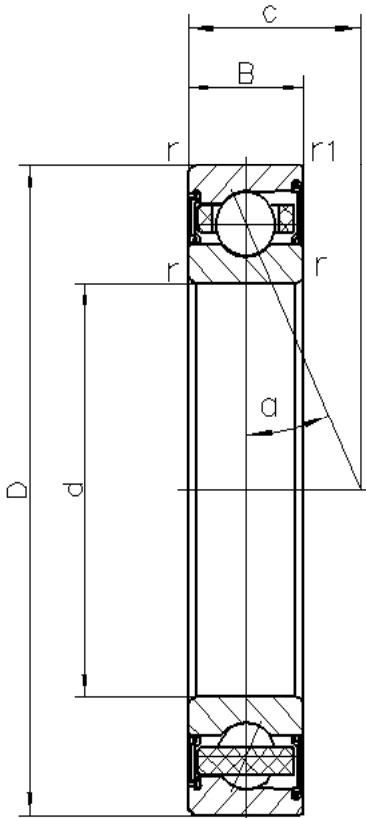

d	60	mm	
D	110	mm	
B	22	mm	
c	22.4	mm	
Da	101	mm	Tolerance: H12
da	69	mm	Tolerance: h12
r _{min}	1.5	mm	
r1 _{min}	1	mm	
ra _{max}	1.5	mm	
ra1 _{max}	1	mm	
α	15°		Contact angle
m	0.796	kg	Mass
Cr	58270	N	Basic dynamic load rating, radial
Cor	45080	N	Basic static load rating, radial
Fv _L	390	N	Preload force
Fv _M	930	N	Preload force
Fv _H	1860	N	Preload force
Ca _L	77.1	N/um	Axial rigidity
Ca _M	112.7	N/um	Axial rigidity
Ca _H	156.9	N/um	Axial rigidity
Limiting speeds	13000	r/min	Lubrication: grease