
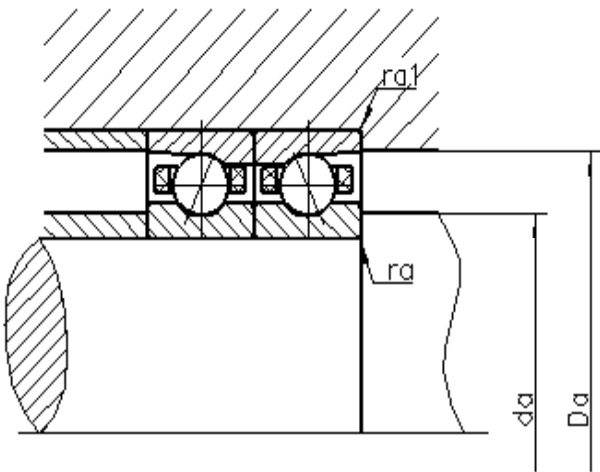


PRECISION ANGULAR CONTACT BALL BEARINGS

TYPE	7212AC-2RZTA/P4S	B7212 E 2RSD T P4S UL
PRECISION	P4S	

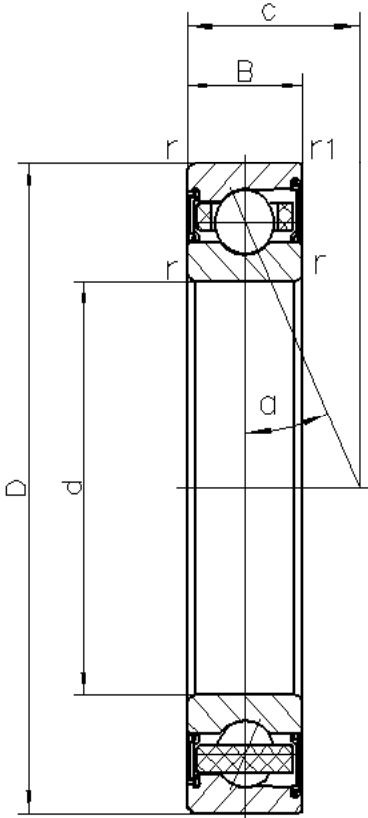

d	60	mm	
D	110	mm	
B	22	mm	
c	30.8	mm	
Da	101	mm	Tolerance: H12
da	69	mm	Tolerance: h12
r_{min}	1.5	mm	
rl_{min}	1	mm	
ra_{max}	1.5	mm	
ral_{max}	1	mm	
α	25°		Contact angle
m	0.796	kg	Mass
Cr	55550	N	Basic dynamic load rating, radial
Cor	42950	N	Basic static load rating, radial
Fv_L	590	N	Preload force
Fv_M	1470	N	Preload force
Fv_H	2940	N	Preload force
Ca_L	182.5	N/um	Axial rigidity
Ca_M	256.7	N/um	Axial rigidity
Ca_H	337.9	N/um	Axial rigidity
Limiting speeds	11000	r/min	Lubrication: grease