
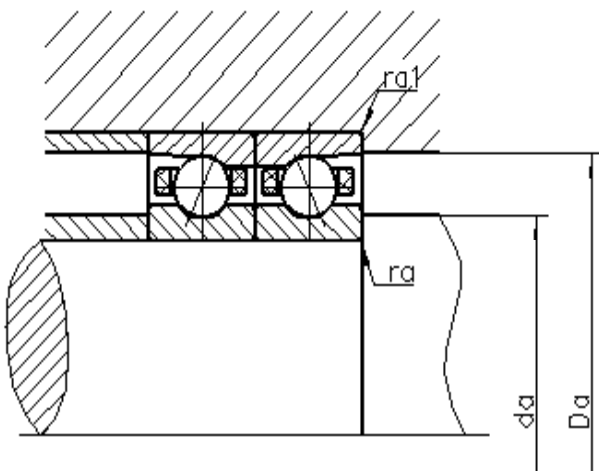


PRECISION ANGULAR CONTACT BALL BEARINGS

TYPE 7015ACTA/P4S B7015 E T P4S UL
PRECISION P4S

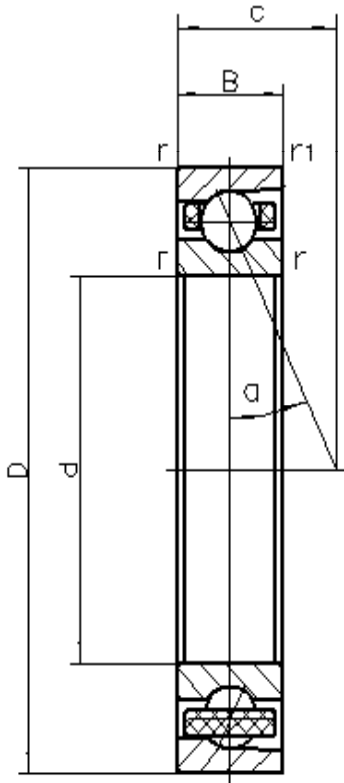

d	75	mm	
D	115	mm	
B	20	mm	
c	32.4	mm	
Da	107	mm	Tolerance: H12
da	82	mm	Tolerance: h12
r _{min}	1.1	mm	
r1 _{min}	0.6	mm	
ra _{max}	1	mm	
ra1 _{max}	0.6	mm	
α	25°		Contact angle
m	0.608	kg	Mass
Cr	46820	N	Basic dynamic load rating, radial
Cor	43840	N	Basic static load rating, radial
Fv _L	490	N	Preload force
Fv _M	1180	N	Preload force
Fv _H	2350	N	Preload force
Ca _L	202.6	N/um	Axial rigidity
Ca _M	280.6	N/um	Axial rigidity
Ca _H	367.3	N/um	Axial rigidity
Limiting speeds	16000	r/min	Lubrication: oil
	9500	r/min	Lubrication: grease