


PRECISION ANGULAR CONTACT BALL BEARINGS

TYPE 71915ACTA/P4S B71915 E T P4S UL
PRECISION P4S

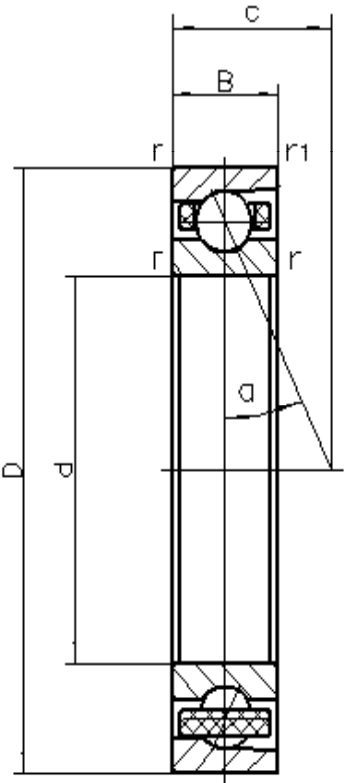

d	75	mm	
D	105	mm	
B	16	mm	
c	29	mm	
Da	99.5	mm	Tolerance: H12
da	81	mm	Tolerance: h12
r _{min}	1	mm	
r _{l min}	0.6	mm	
r _{a max}	0.6	mm	
r _{al max}	0.6	mm	
α	25°		Contact angle
m	0.359	kg	Mass
Cr	31210	N	Basic dynamic load rating, radial
Cor	31090	N	Basic static load rating, radial
Fv _L	290	N	Preload force
Fv _M	740	N	Preload force
Fv _H	1470	N	Preload force
Ca _L	170.7	N/um	Axial rigidity
Ca _M	241.1	N/um	Axial rigidity
Ca _H	314.6	N/um	Axial rigidity
Limiting speeds	17000	r/min	Lubrication: oil
	10000	r/min	Lubrication: grease