


PRECISION ANGULAR CONTACT BALL BEARINGS

TYPE 7213CTA/P4S B7213 C T P4S UL  
PRECISION P4S

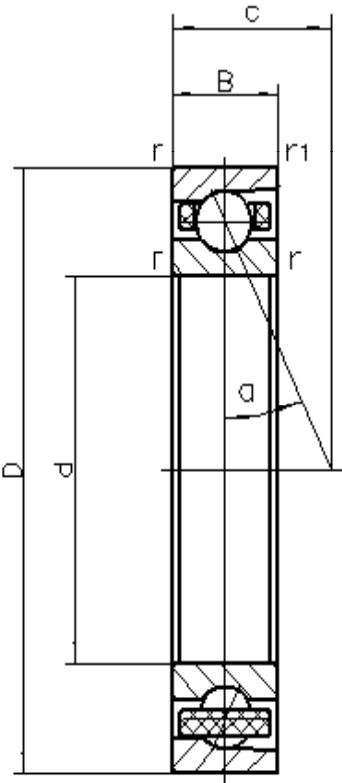

d	65	mm	
D	120	mm	
B	23	mm	
c	23.9	mm	
Da	109.5	mm	Tolerance: H12
da	75.5	mm	Tolerance: h12
r min	1.5	mm	
r1 min	1	mm	
ra max	1.5	mm	
ra1 max	1	mm	
α	15°		Contact angle
m	1	kg	Mass
Cr	69810	N	Basic dynamic load rating, radial
Cor	54780	N	Basic static load rating, radial
Fv L	440	N	Preload force
Fv M	1080	N	Preload force
Fv H	2160	N	Preload force
Ca L	82.4	N/um	Axial rigidity
Ca M	121.6	N/um	Axial rigidity
Ca H	169	N/um	Axial rigidity
Limiting speeds	19000	r/min	Lubrication: oil
	12000	r/min	Lubrication: grease