
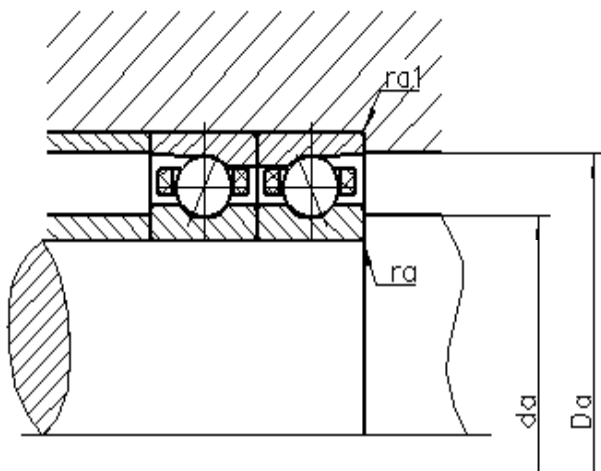


PRECISION ANGULAR CONTACT BALL BEARINGS

TYPE 7213ACTA/P4S B7213 E T P4S UL
PRECISION P4S

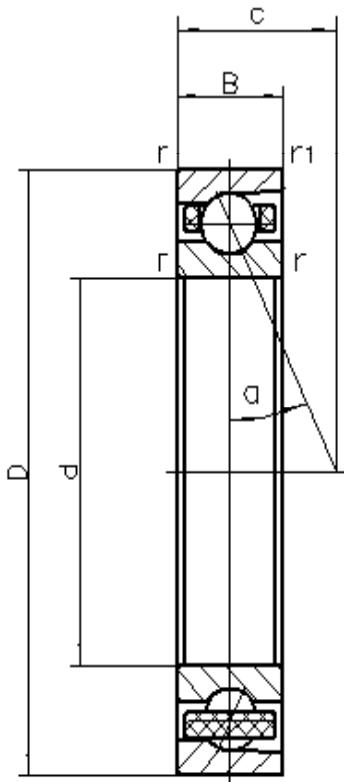

d	65	mm	
D	120	mm	
B	23	mm	
c	33.1	mm	
Da	109.5	mm	Tolerance: H12
da	75.5	mm	Tolerance: h12
r _{min}	1.5	mm	
r _{l min}	1	mm	
ra _{max}	1.5	mm	
ra _{l max}	1	mm	
α	25°		Contact angle
m	1	kg	Mass
Cr	66570	N	Basic dynamic load rating, radial
Cor	52300	N	Basic static load rating, radial
Fv _L	690	N	Preload force
Fv _M	1670	N	Preload force
Fv _H	3330	N	Preload force
Ca _L	198.4	N/um	Axial rigidity
Ca _M	275.9	N/um	Axial rigidity
Ca _H	362.1	N/um	Axial rigidity
Limiting speeds	17000	r/min	Lubrication: oil
	10000	r/min	Lubrication: grease