
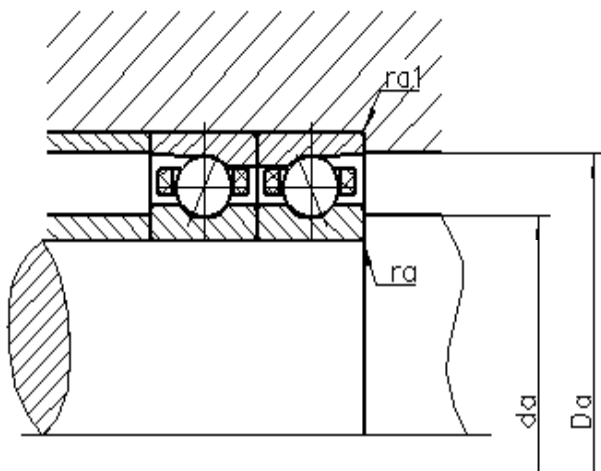


PRECISION ANGULAR CONTACT BALL BEARINGS

TYPE 7217CTA/P4S B7217 C T P4S UL
PRECISION P4S

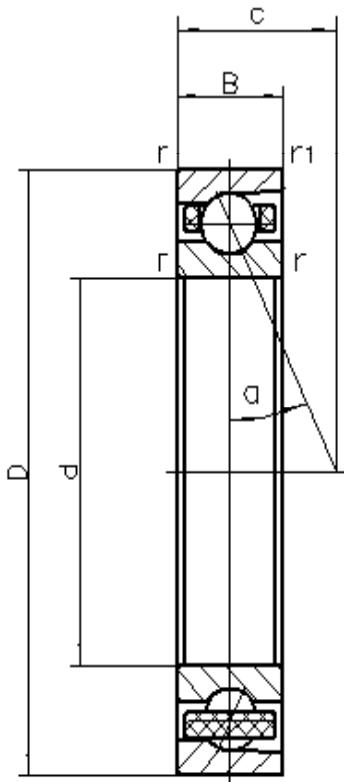

d	85	mm	
D	150	mm	
B	28	mm	
c	29.7	mm	
Da	138	mm	Tolerance: H12
da	98	mm	Tolerance: h12
r _{min}	2	mm	
r1 _{min}	1	mm	
ra _{max}	2	mm	
ra1 _{max}	1	mm	
α	15°		Contact angle
m	1.82	kg	Mass
Cr	99750	N	Basic dynamic load rating, radial
Cor	84650	N	Basic static load rating, radial
Fv _L	690	N	Preload force
Fv _M	1670	N	Preload force
Fv _H	3330	N	Preload force
Ca _L	106.5	N/um	Axial rigidity
Ca _M	156.4	N/um	Axial rigidity
Ca _H	217.3	N/um	Axial rigidity
Limiting speeds	15000	r/min	Lubrication: oil
	9000	r/min	Lubrication: grease