



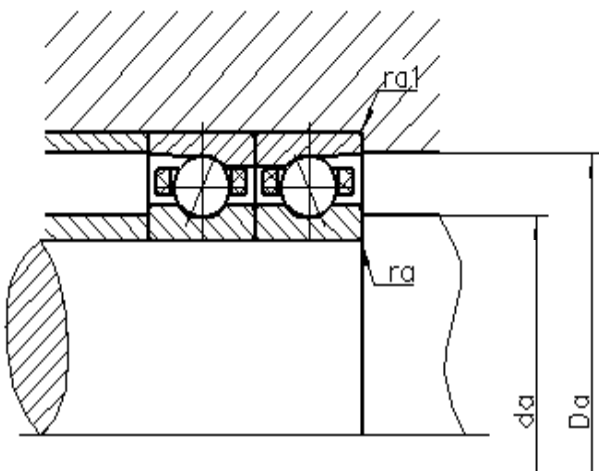

| | | |
|-----------|--------------|------------------|
| TYPE | 7217ACTA/P4S | B7217 E T P4S UL |
| PRECISION | P4S | |

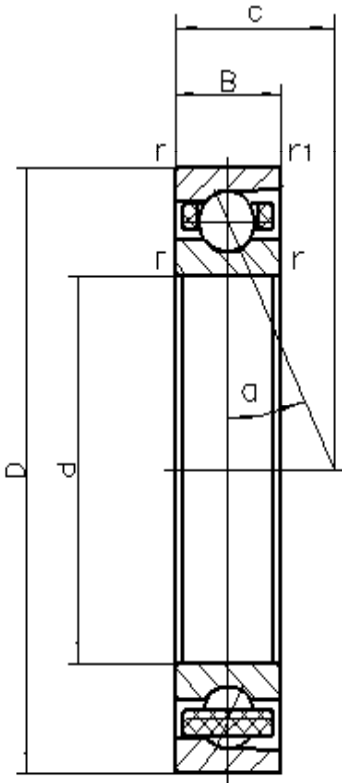

| | | | |
|----------------------------|-------|-------|-----------------------------------|
| d | 85 | mm | |
| D | 150 | mm | |
| B | 28 | mm | |
| c | 41.4 | mm | |
| Da | 138 | mm | Tolerance: H12 |
| da | 98 | mm | Tolerance: h12 |
| r min | 2 | mm | |
| r1 min | 1 | mm | |
| ra max | 2 | mm | |
| ral max | 1 | mm | |
| α | 25° | | Contact angle |
| m | 1.82 | kg | Mass |
| Cr | 94960 | N | Basic dynamic load rating, radial |
| Cor | 80880 | N | Basic static load rating, radial |
| Fv L | 1080 | N | Preload force |
| Fv M | 2450 | N | Preload force |
| Fv H | 4900 | N | Preload force |
| Ca L | 256 | N/um | Axial rigidity |
| Ca M | 347.3 | N/um | Axial rigidity |
| Ca H | 456.1 | N/um | Axial rigidity |
| Limiting speeds | 13000 | r/min | Lubrication: oil |
| | 8000 | r/min | Lubrication: grease |