
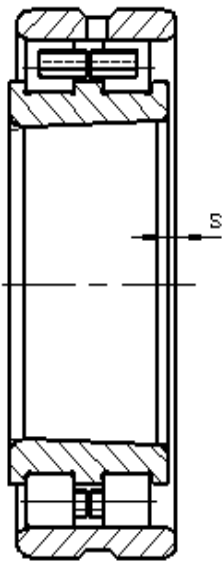


# PRECISION CYLINDRICAL ROLLER BEARINGS

TYPE NN3009KM/W33-SP

PRECISION SP

Double row, with 1:12 taper bore

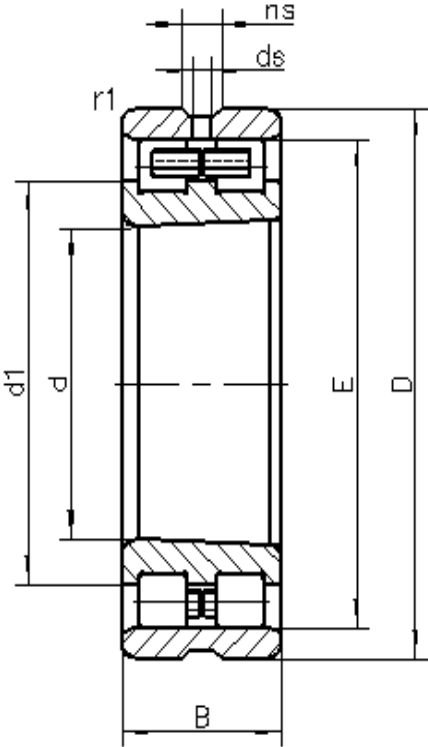

d	45	mm	
D	75	mm	
B	23	mm	
Da	69	mm	Tolerance: H12
da	53.5	mm	Tolerance: h12
r1 min	1	mm	
ra1 max	1	mm	
E	67.5	mm	
dl	56.3	mm	
ns	5	mm	
ds	2.5	mm	
s	1.15	mm	Axial displacement facility from centre position
m	0.39	kg	Mass
Cr	51800	N	Basic dynamic load rating, radial
Cor	68600	N	Basic static load rating, radial
Limiting speeds	14000	r/min	Lubrication: oil
	11000	r/min	Lubrication: grease

