
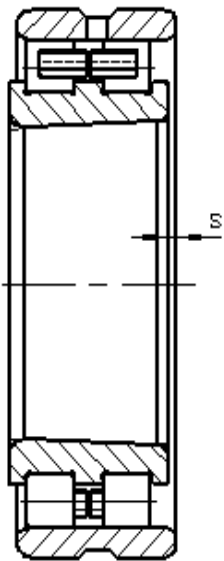


# PRECISION CYLINDRICAL ROLLER BEARINGS

TYPE NN3010KM/W33-SP

PRECISION SP

Double row, with 1:12 taper bore

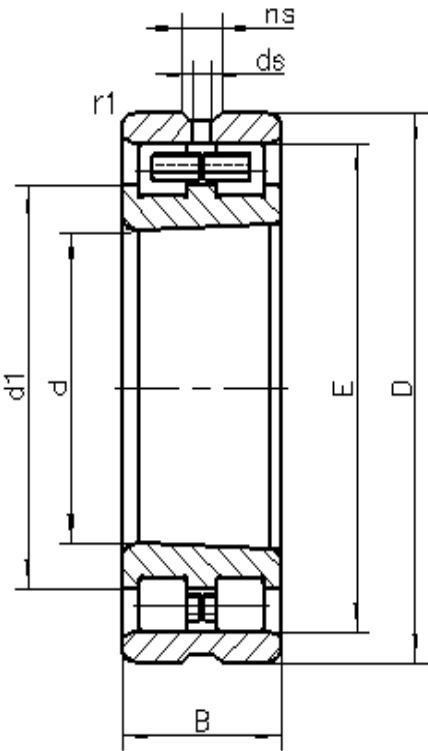

d	50	mm	
D	80	mm	
B	23	mm	
Da	74	mm	Tolerance: H12
da	58.5	mm	Tolerance: h12
r1 min	1	mm	
ra1 max	1	mm	
E	72.5	mm	
dl	61.3	mm	
ns	5	mm	
ds	2.5	mm	
s	1.15	mm	Axial displacement facility from centre position
m	0.43	kg	Mass
Cr	54900	N	Basic dynamic load rating, radial
Cor	75900	N	Basic static load rating, radial
Limiting speeds	13000	r/min	Lubrication: oil
	10000	r/min	Lubrication: grease

