



PRECISION CYLINDRICAL ROLLER BEARINGS



TYPE NN3012KM/W33-SP

PRECISION SP

Double row, with 1:12 taper bore

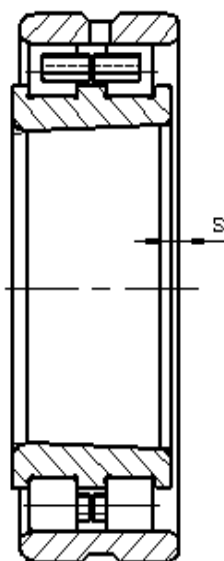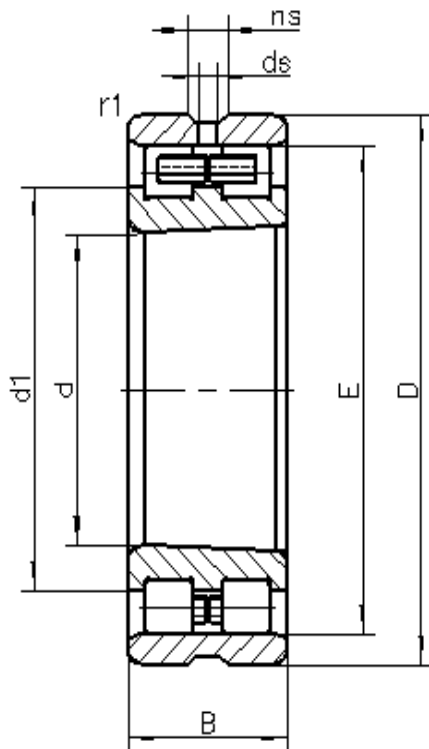

d	60	mm	
D	95	mm	
B	26	mm	
Da	88	mm	Tolerance: H12
da	70.1	mm	Tolerance: h12
r1 min	1.1	mm	
ra1 max	1	mm	
E	86.1	mm	
dl	73.3	mm	
ns	5	mm	
ds	2.5	mm	
s	1.1	mm	Axial displacement facility from centre position
m	0.67	kg	Mass
Cr	77200	N	Basic dynamic load rating, radial
Cor	113700	N	Basic static load rating, radial
Limiting speeds	10000	r/min	Lubrication: oil
	8500	r/min	Lubrication: grease

