
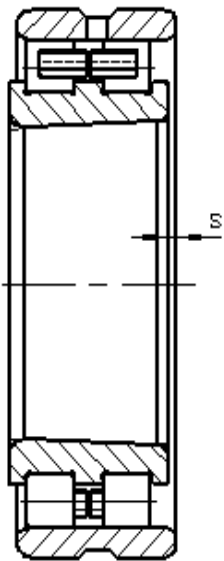


# PRECISION CYLINDRICAL ROLLER BEARINGS

TYPE NN3014KM/W33-SP

PRECISION SP

Double row, with 1:12 taper bore

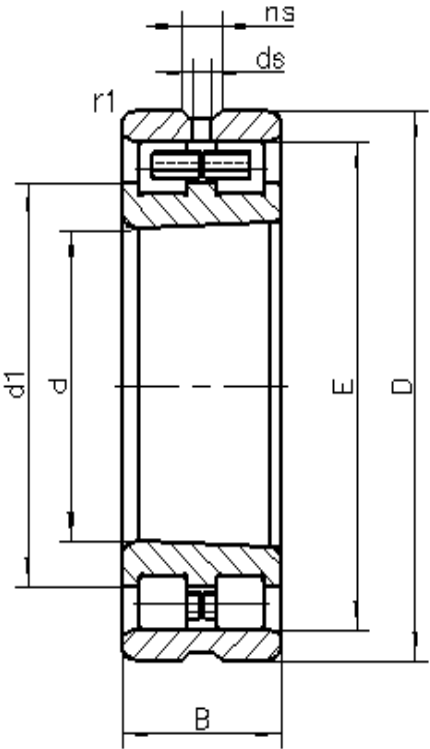

d	70	mm	
D	110	mm	
B	30	mm	
Da	102	mm	Tolerance: H12
da	82	mm	Tolerance: h12
r1 min	1.1	mm	
ra1 max	1	mm	
E	100	mm	
dl	85.6	mm	
ns	5	mm	
ds	2.5	mm	
s	1.3	mm	Axial displacement facility from centre position
m	1.04	kg	Mass
Cr	94500	N	Basic dynamic load rating, radial
Cor	142700	N	Basic static load rating, radial
Limiting speeds	8500	r/min	Lubrication: oil
	7000	r/min	Lubrication: grease

